










Selective and broadband high frequency field analysis

-  **Powerful receiver for selective and wideband measurements in all 3 spatial directions**
-  **Isotropic measurements
in the 9 kHz to 30 MHz range EHP-200A
in the 3 kHz to 30 MHz range EHP-200AC**
-  **Electric Fields
from 0.02 to 1000 V/m**
-  **Magnetic Fields
from 0.6 mA/m to 300 A/m EHP-200A
from 6 mA/m to 1000 A/m EHP-200AC**
-  **Built-in Frequency Spectrum Analysis**
-  **Built-in rechargeable Li-Ion battery**
-  **Optical interface for remote control and result display
avoids distortion of the field under test**
-  **Control and display using a PC or the 8053 DISPLAY
Broadband Field Meter**



E&H FIELD ANALYZER

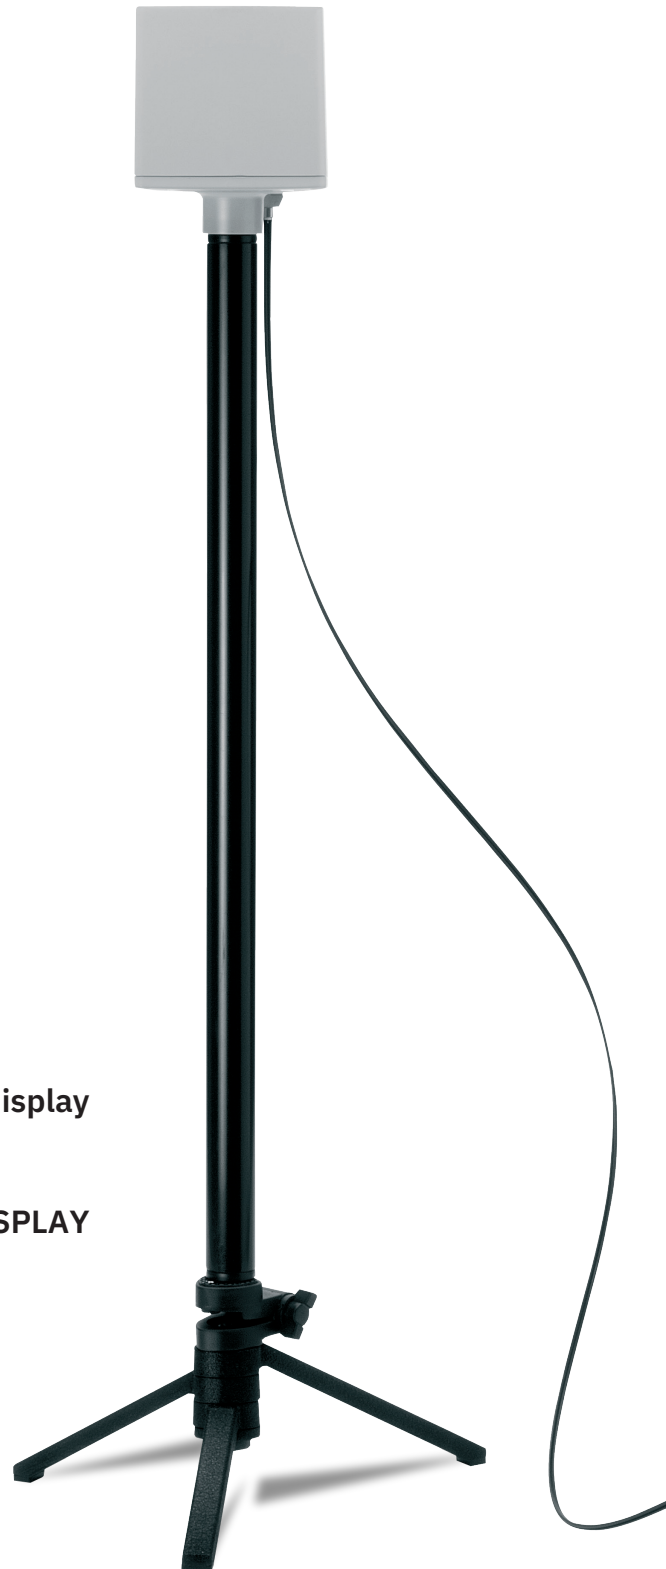The E-H field analyzer EHP-200 was designed for accurate isotropic measurements of both electric and magnetic fields in the 3 kHz - 30 MHz frequency range, with no or minimum perturbation of the fields to be measured.

Field sensors and electronic measuring circuitry are fitted into robust housing, only 92 x 92 x 109 mm in size. Separate 3 axis and total values (actual and average) are measured with exceptional flatness and linearity of 0.5 dB. Results are expressed in V/m, A/m, μ T, mW/cm², mG, W/m², Ohm, % (percentage of the selected limit). When the auxiliary input is selected measurement results are expressed in mV or dBm.

The EHP-200 features built-in spectrum analysis with maximum BW resolution of 1 kHz for detailed measurements of E and H field intensity vs. frequency, with dynamic range of 80 dB. The built-in rechargeable Li-Ion battery provides up to 12 hours of continuous operation.

The EHP-200 is controlled by the PC through the optical fibre link, and measurements are displayed in real time. Additional input is available to measure the frequency spectrum of external signals.

APPLICATIONS

Safety in occupational environments

According to several safety regulations worker exposure should not exceed specified limits.

Emission from several industrial machines operating in the high frequency range could be potentially dangerous to the operator.

In the near field region near that kind of apparatus accurate measurements of both electric and magnetic fields should be taken to demonstrate compliance to safety standards.

EHP-200, equipped with both electric and magnetic field sensors within a small housing, is the ideal solution to perform accurate measurements and spectrum analysis.

Broadcasting Surveillance

The EHP-200 is particularly useful in measuring the actual fields generated by long, medium and short wave broadcast transmitters, to ensure safety around the sites of large antennas, to control power transmitted in the radiation direction, to test transmitting antenna functions and identify borders between near and far field regions.

Wave impedance

As a unique feature, the PC program calculates field wave impedance by dividing the total value of the E-field by that of the H-field. This method is particularly suitable for evaluating the non-linear, scattered near-field region of large broadcast antenna systems.

Fields generated by metal detectors and RFID's

Fields generated by a number of devices using RF to detect the presence of metals, to identify objects, anti-theft systems etc. can now be measured easily and accurately.



EHP200-TS APPLICATION SOFTWARE

The developed EHP200-TS software allows the user to control analyzers such as EHP-200 through a personal computer. The optical cable coming from the analyzer (Max length: 40m) can be easily connected to the PC by the provided optical to USB converter USB-OC. If longer distance is required the optional 8053-OC optical to RS232 converter can be used for optical fibre length up to 80m. A user friendly graphical interface includes commands to set all parameters.


For intuitive operation, controls are grouped in five selectable sections while the spectrum measurement is continuously displayed and updated. Both electric and magnetic field spectrum measurements can be displayed on the same graph.

Sweep, Mode, Limit and Appearance sections are used to set all measurement and display parameters while Data section, with the Marker controls, shows numerical results like field strength and frequency at the marker and highest peak positions.


A wideband measurement is displayed too, including all contributions within the spectrum shown. Several units, as well as percentage of limit, can be selected to display measurement results which, along with user comments, can be saved as either bitmap or text files to be easily imported in other software applications like spreadsheets or word processor.

Following the so called precautionary principle, many countries adopted their own reference limits. Besides having ICNIRP limits already available, EHP200-TS allows the user to create and save custom limits which may reflect local regulations as well as user specific needs.


All values of the selected limit are always included, for reference, in any.bmp or .txt saved file. Availability of lightweight devices equipped with Windows™ operating system like Ultra Mobile PC and similar, makes EHP200-TS software the ideal solution to perform accurate on-site spectrum analysis with minimum effort and light equipment.

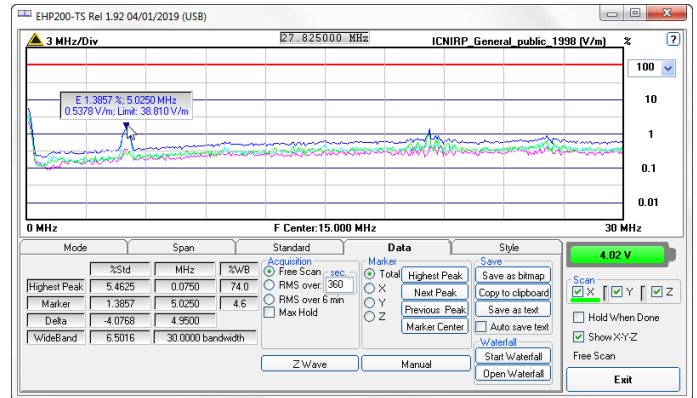

Limit value can be shown at Marker frequency. Data section shows numerical results. It includes Marker controls and Save buttons

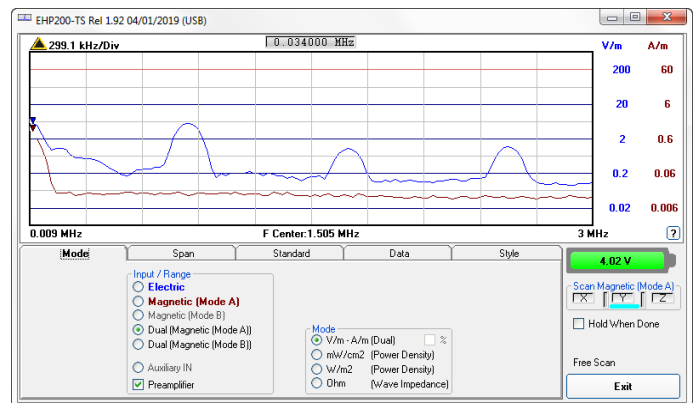

Spectrum graph can be shown as percentage of selected limit. Mode section allows to select different acquisition modes as well as range, unit and linear or logarithmic frequency scale.

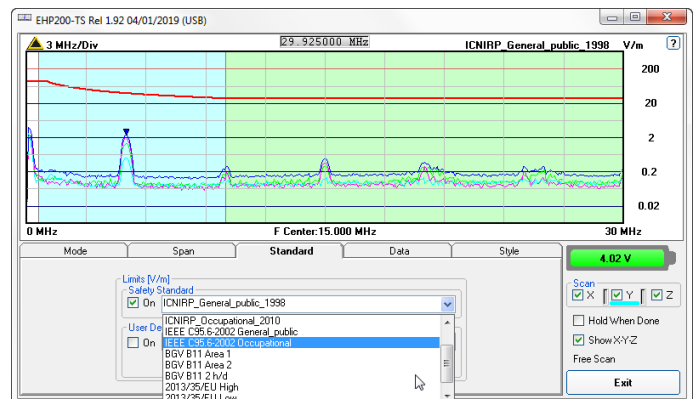

Power density spectrum is calculated over real electric and magnetic field measurement and therefore applicable to both far and near field conditions.

Technical specifications of the EHP-200A

| | Electric Field | Magnetic Field Mode A | Magnetic Field Mode B | AUX Input |
|------------------------------|---|--|--|---------------------------------------|
| Frequency range | 9 kHz to 30 MHz | 9 kHz to 3 MHz | 300 kHz to 30 MHz | 9 kHz to 30 MHz |
| Measurement range @10kHz RBW | 0.1 to 1000 V/m | 30 mA/m to 300 A/m | 3 mA/m to 30 A/m | -80 to 0 dBm |
| with preamplifier ON | 0.02 to 200 V/m | 6 mA/m to 60 A/m | 0,6 mA/m to 60 A/m | -94 to -14 dBm |
| Resolution | 0.01 V/m | 1 mA/m | 0,1 mA/m | 0.01 dB |
| Sensitivity @10kHz RBW | 0.1 V/m | 30 mA/m | 3 mA/m | -80 dBm |
| with preamplifier ON | 0.02 V/m | 6 mA/m | 0.6 mA/m | -94 dBm |
| Flatness | 0.5 dB 100 kHz to 27 MHz @ 20 V/m | 0.8 dB 150 kHz to 3 MHz @ 166 mA/m | 0.8 dB 300 kHz to 27 MHz @ 53 mA/m | 0.4 dB 9 kHz to 30 MHz @ -20dBm |

Technical specifications of the EHP-200AC

| | Electric Field | Magnetic Field Mode A | Magnetic Field Mode B | AUX Input |
|------------------------------|---|---------------------------------------|--|---------------------------------------|
| Frequency range | 3 kHz to 30 MHz | 3 kHz to 300 kHz | 30 kHz to 30 MHz | 3 kHz to 30 MHz |
| Measurement range @10kHz RBW | 0.1 to 1000 V/m | 0.1 A/m to 1 kA/m | 30 mA/m to 300 A/m | -80 to 0 dBm |
| with preamplifier ON | 0.02 to 200 V/m | 20 mA/m to 200 A/m | 6 mA/m to 60 A/m | -94 to -14 dBm |
| Resolution | 0.01 V/m | 1 mA/m | 0.1 mA/m | 0.01 dB |
| Sensitivity @10kHz RBW | 0.1 V/m | 0.1 A/m | 30 mA/m | -80 dBm |
| with preamplifier ON | 0.02 V/m | 20 mA/m | 6 mA/m | -94 dBm |
| Flatness | 0.5 dB 100 kHz to 27 MHz @ 20 V/m | 0.8 dB 5 kHz to 300 kHz @ 1 A/m | 0.8 dB 30 kHz to 10 MHz @ 166 mA/m | 0.4 dB 9 kHz to 30 MHz @ -20dBm |

| General specifications | | | | |
|--|---|-----------------------|-----------------------|-----------|
| | Electric Field | Magnetic Field Mode A | Magnetic Field Mode B | AUX Input |
| EHP-200A Anisotropy @1MHz EHP-200AC Anisotropy @ 300kHz | 0.8 dB | | | --- |
| Rejection to E fields | --- | >20 dB | | --- |
| Rejection to H fields | >20 dB | --- | | --- |
| EHP-200A Linearity @1MHz EHP-200AC Linearity @300kHz | 0.5 dB from FS to -60 dBFS (FS=Full Span) | | | |
| Dynamic range | >80 | | | |
| SPAN | 0 to FULL SPAN | | | |
| RBW | 1 kHz, 3 kHz, 10 kHz, 30 kHz, 100 kHz, 300 kHz | | | |
| Measurement range | > 94 dB | | | |
| Calibration | internal E2PROM | | | |
| Temperature error | 0.02 dB/°C | | | |
| Dimensions | 92 x 92 x 109 mm | | | |
| Weight | 550 g | | | |
| Preamplifier | selectable ON/OFF, 14dB | | | |
| Units | V/m, A/m, uT, mW/cm ² , W/m ² | | | |
| Internal battery | 3.7 V - 5.55 Ah Li-Ion, rechargeable | | | |
| Operation | > 12 hours | | | |
| Recharging time | < 8 hours | | | |
| External supply | 10 to 15 Vdc, I = approx. 560 mA | | | |
| Optical fiber connection | up to 40 m (USB-OC) up to 80 m (8053-OC) | | | |
| Firmware updating | through the optical link via EHP200-TS | | | |
| Self test | automatic at power on | | | |
| Operating temperature | -10°C to +50°C | | | |
| Storage temperature | -20°C to +70°C | | | |
| Environmental protection | IP42 | | | |

ORDERING INFORMATION

| Basic Unit | Part Number |
|---|-------------|
| EHP-200A | 650.000.201 |
| EHP-200AC | 650.000.267 |
| Standard Accessories | |
| <ul style="list-style-type: none"> - Soft carrying case - AC/DC battery charger with international plug adapters - FO-8053/10 optical fiber - FO-10USB optical fiber - USB-OC Optical converter - Plastic rod support - Small tripod - Software media EHP-200TS - Operating Manual - Certificate of calibration | |
| The following accessories can be ordered separately | Part Number |
| 8053-CA, car adapter | 650.000.058 |
| 8053-Display, broadband field meter | 620.000.057 |
| FO-8053/20 Cable, fiber optic 20 m | 650.000.055 |
| FO-8053/40 Cable, fiber optic 40 m | 650.000.052 |
| FO-8053/80 Cable, fiber optic 80 m | 650.000.128 |
| FO-20USB Cable, fiber optic 20 m | 655.000.178 |
| FO-40USB Cable, fiber optic 40 m | 650.000.182 |
| TR-02A, wooden tripod 1-2m with soft carrying bag | 650.000.005 |
| TT-01, telescopic mast (120-420 cm) with carrying bag | 650.000.005 |
| 8053-CC, rigid case | 650.000.059 |
| 8053-OC, Optical RS232 converter | 650.000.062 |
| 8053-OC-PS, Power Supply | 650.000.179 |

Narda Safety Test Solutions GmbH
 Sandwiesenstrasse 7
 72793 Pfullingen, Germany
 Phone: +49 (0) 7121-97 32-0
 info.narda-de@narda-sts.com
 www.narda-sts.com

Narda Safety Test Solutions
 435 Moreland Road
 Hauppauge, NY 11788, USA
 Phone: +1 631 231-1700
 Fax: +1 631 231-1711
 info@narda-sts.com
 www.narda-sts.com

Narda Safety Test Solutions Srl
 Via Rimini 22
 20142 Milano - ITALY
 Phone: +39 02 581881
 Fax: +39 02 58188273
 E-mail: nardait.support@narda-sts.it
 www.narda-sts.it

Narda Safety Test Solutions GmbH
 Beijing Representative Office
 Xiyuan Hotel, No. 1 Sanlihe Road, Haidian
 100044 Beijing, China
 Phone +86 10 6830 5870
 support@narda-sts.cn