

E-FIELD PROBE

EF0691

Measuring electric fields from 100 kHz to 6 GHz

using instruments in the NBM-500 family

- ▲ **Field exposure from broadcasting, telecoms and industrial equipment**
- ▲ **Measurements on base stations (EN 50492 and IEC 62232)**
- ▲ **Isotropic (non-directional) measurement**
- ▲ **65 dB dynamic without changing range**
- ▲ **High sensitivity starting at 0.38 V/m**

The probe contains three orthogonally arranged dipoles with detector diodes. The three voltages, corresponding to the spatial components, are available individually at the probe output. The NBM basic unit calculates the resulting isotropic field strength.

APPLICATIONS

The probe detects electric fields from 100 kHz to 6 GHz, covering the fields that occur in broadcasting, telecoms, and industry. The high sensitivity of 0.38 V/m and wide frequency range make it ideal for new WLAN applications. In the frequency range of mobile phone base stations the probe exceeds the requirements of the latest basic standard EN 50492 and IEC 62232.

PROPERTIES

The probe is designed with mechanical and electrical properties ideal for field use. The probe head is made of foam material to provide effective protection for the sensors, while having excellent RF characteristics.

CALIBRATION

The probe is calibrated at several frequencies. The correction values are stored in an EPROM in the probe and are automatically taken into account by the NBM instrument. Calibrated accuracy is thus obtained regardless of the combination of probe and instrument.



SPECIFICATIONS ^a

Probe EF0691		Electric (E-)Field	
Frequency range ^(b)	100 kHz to 6 GHz		
Type of frequency response	Flat		
Measurement range	0.38 to 650 V/m (CW) 0.38 to 22 V/m (True RMS)	38 nW/cm² to 112 mW/cm² (CW) 38 nW/cm² to 0.13 mW/cm² (True RMS)	
Dynamic range	65 dB		
CW damage level	1000 V/m	265 mW/cm²	
Peak damage level ^(c)	10 kV/m	26 W/cm²	
Sensor type	Diode based system		
Directivity	Isotropic (Tri-axial)		
Readout mode / spatial assessment	3 separate axes		
UNCERTAINTY			
Flatness of frequency response ^(d) Calibration uncertainty not included	+1.0/-1.5 dB (0.3 MHz to 1 MHz) ±1.0 dB (1 MHz to 1 GHz) ±1.5 dB (1 GHz to 4 GHz) -1.8 dB typ. @ 5 GHz		
Calibration uncertainty ^(e) @ 0.2 mW/cm² (27.5 V/m)	0.8 dB (≤ 300 MHz) 1.5 dB (300 MHz to 1.2 GHz) 1.3 dB (≥ 1.2 GHz)		
Linearity Referred to 0.2 mW/cm² (27.5 V/m)	±0.5 dB (2.2 to 316 V/m)	±0.5 dB (0.0013 to 26.5 mW/cm²)	
Isotropic response ^(f)	±1 dB (0.1 MHz to 5 GHz) ±1.2 dB (> 5 GHz)		
Temperature response	+0.2/-1 dB (0 °C to 50 °C, related to 23 °C)		
GENERAL SPECIFICATIONS			
Factory calibration frequencies	0.1/ 0.2/ 0.3/ 1/ 3/ 10/ 27.12 MHz 0.1/ 0.2/ 0.3/ 0.5/ 0.75/ 1/ 1.8/ 2.45/ 2.7/ 3/ 4/ 5/ 6 GHz		
Recommended calibration interval	24 months		
Temperature range Operating Non-operating (transport)	0 °C to +50 °C -40 °C to +70 °C		
Humidity	5 to 95 % RH @ ≤25 °C	≤23 g/m³ absolute humidity	
Size	318 mm x 66 mm Ø		
Weight	90 g		
Compatibility	NBM-500 series meters		
Country of origin	Germany		

(a) Unless otherwise noted specifications apply at reference condition: device in far-field of source, ambient temperature 23±3 °C, relative air humidity 25% to 75%, sinusoidal signal

(b) Cutoff frequency at -3 dB (typ.). The specifications apply to all probes with a serial number beginning with "B" or a subsequent letter

(c) Pulse length 1µsec, duty cycle 1:100

(d) Frequency response can be compensated for by the use of correction factors stored in the probe memory




(e) Expanded measurement uncertainty. Accuracy of the fields generated to calibrate the probes

(f) Uncertainty due to varying polarization (verified by type approval test for meter with probe). Ellipse ratio included and calibrated for each probe.

ORDERING INFORMATION

Part number	
Probe EF0691, E-Field, for NBM, 100kHz-6GHz	2402/14B
Probe EF0691, E-Field, ACC - with accredited (DAkkS) calibration, basic unit required	2402/14B/ACC

CHARACTERISTICS

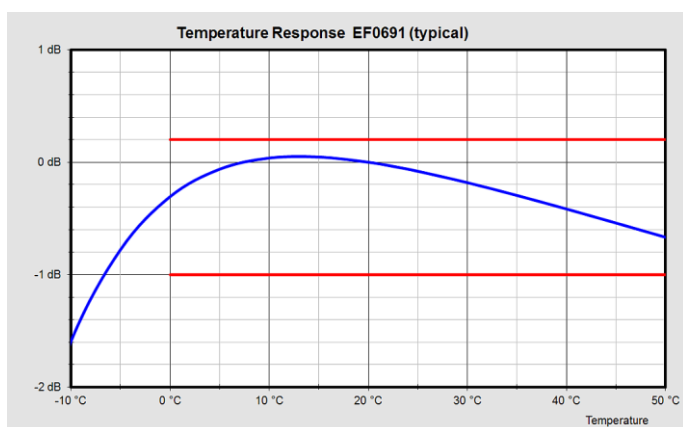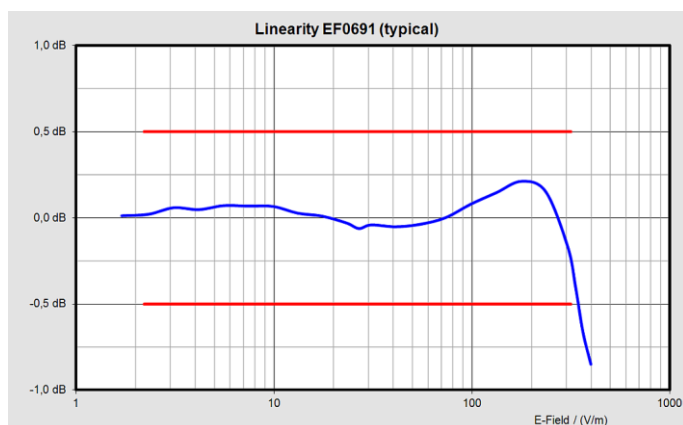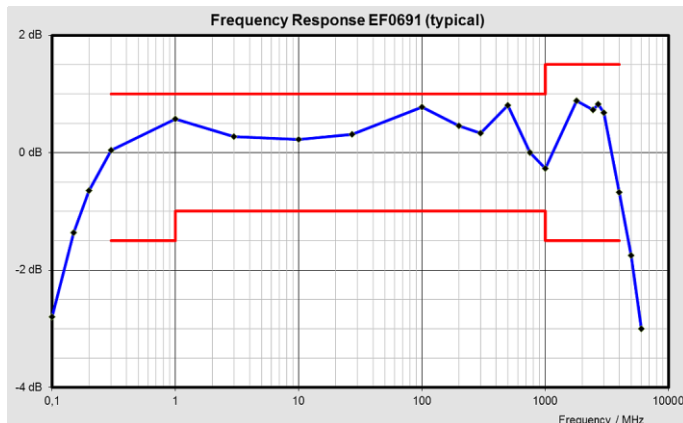

Narda Safety Test Solutions GmbH
Sandwiesenstraße 7
72793 Pfullingen, Germany
Tel. +49 7121 97 32 0
Fax +49 7121 97 32 790
support.narda-de@L-3com.com
www.narda-sts.com

Narda Safety Test Solutions
435 Moreland Road
Hauppauge, NY 11788, USA
Phone +1 631 231-1700
Fax +1 631 231-1711
NardaSTS@L-3COM.com
www.narda-sts.us

Narda Safety Test Solutions Srl
Via Leonardo da Vinci, 21/23
20090 Segrate (Milano), Italy
Phone +39 02 26 998 71
Fax +39 02 26 998 700
nardait.support@L-3com.com
www.narda-sts.it

© Names and Logo are registered trademarks of Narda Safety Test Solutions GmbH and L3 Communications Holdings, Inc. - Trade names are trademarks of the owners.