



- Automates instrument calibration, record-keeping, diagnostics and recharging
- Stand-alone Instrument Docking Stations (IDS)
- Link up to 100 IDSs
 - Dock hundreds of instruments
 - Multilingual display
 - One centralized database

SPECIFICATIONS

COMPATIBLE MONITORS SUPPORTED:

MX6 iBrid™, Ventis™ MX4, Tango™ TX1, GasBadge® Pro.

CASE:

Impact-resistant composite with radio frequency interference (RFI) protection

DIMENSIONS:

24.8 cm x 16.3 cm x 22.9 cm (9.75" h x 6.40" w x 9.00" d)

INPUT:

115/230 VAC, 50/60 Hz. 12 VDC

OPERATING TEMPERATURE:

0°C to +50°C (32° F to +122°F)

COMMUNICATION:

10bT Ethernet support, RJ-45 Category 5 connection

DISPLAY:

128 x 64 Dot Matrix LCD – Multilingual modes allow selections in English, Spanish, French and German languages

PUMP FLOW RATE:

500 ml/minute @ 80" H₂O

GAS INPUTS:

3 separate inputs on each IDS. Ability to share up to 14 discrete gases for calibration when IDSs are clustered together.

DS2 COMPUTER REQUIREMENTS (MIN):


For 1-8 IDS units: Dedicated Pentium III, 800 MHz, 256 MB RAM, 4GB available disk space, Windows® 2000 Professional, Windows® XP Professional operating system, one Cat5E Ethernet network adapter, fixed IP address

For 9-100 IDS units: Dedicated Pentium III, 800 MHz, 256 MB RAM, 4GB available disk space, Windows® 2000 Standard Server, Windows® 2003 Server operating system, one Cat5E Ethernet network adapter, fixed IP address



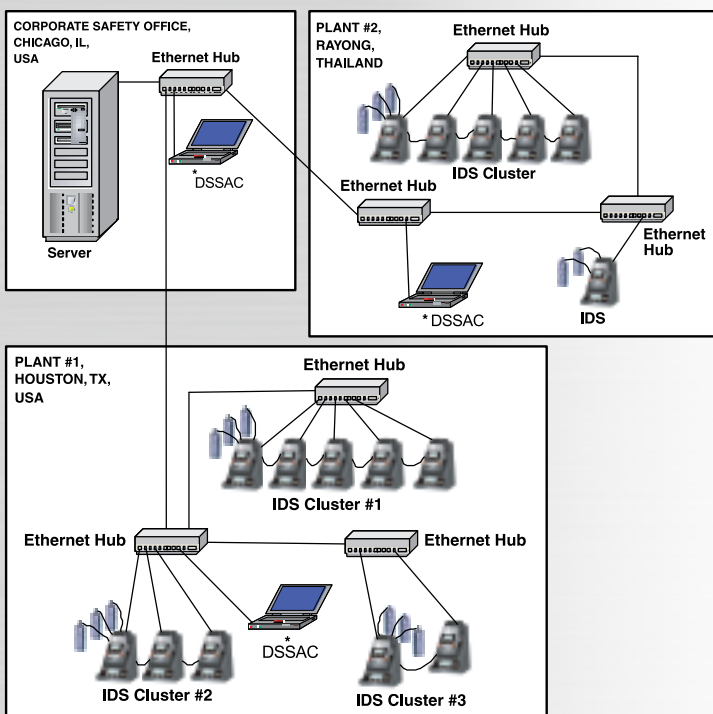
The DS2 Docking Station™ provides the ultimate flexibility for managing your gas monitors wherever you use them. Ethernet connectivity enables you to link up to 100 stand-alone Instrument Docking Stations (IDSs) from anywhere in your facility and relay the data back to one central database for total instrument management. A graphical user interface tool allows an administrator to view operations on each Docking Station from a network computer, making it easy to track instruments, print reports, set events and change parameters for any location. The DS2 gives you all of the benefits of consistent automated calibration, record keeping, battery recharging, and instrument diagnostics for your monitors to limit your liabilities and safety hazards.

Each individual IDS features a multilingual display, three status LEDs, a keypad and an audible alarm to provide important instrument details at a single glance. The DS2, which can be easily grouped into 'clusters' of up to 5 units to share calibration gas, also offers optional iGas® capability to automatically identify calibration gas cylinder concentrations, lot numbers, and expiration dates on the system. Whether you manage one gas monitor or an entire fleet, the DS2 provides superior cost-savings and flexibility.

SMALL INSTALLATION SCENARIO

SINGLE-LOCATION COMPANY

Illustrates one DS2 installation on a stand-alone Ethernet, with 2 IDSs in a cluster sharing 2 cylinders of calibration gas.

Instrument data is available at the local level.

LARGE INSTALLATION SCENARIO

MULTI-LOCATION COMPANY

Illustrates multiple IDS cluster installations at multiple sites all tied together on a common company Ethernet, sharing a common database. Each cluster of IDSs share calibration gas. Instrument data can be accessed at the plant level as well as by the corporate safety office.

| PART NUMBER | DESCRIPTION |
|-----------------|---|
| 18106724-ABC+ | DS2 Instrument Docking Station (IDS) for MX6 iBrid™ |
| 18108630-ABC+ | DS2 Instrument Docking Station (IDS) for Ventis™ MX4 |
| 18109249-ABC+ | DS2 Instrument Docking Station (IDS) for Tango™ TX1 |
| 18106302-ABC+ | DS2 Instrument Docking Station (IDS) for GasBadge® Pro |
| 18106543-4 | GasBadge® Pro/DS2 Laptop Turnkey System++ |
| 18106543-5 | MX6/DS2 Laptop Turnkey System++ |
| 18106543-8 | Ventis/DS2 Laptop Turnkey System++ |
| 18109261 | Tango/DS2 Laptop Turnkey System++ |
| 17153596-EUR-FR | DS2 Server, European, French Version+++ |
| 17153596-EUR-EN | DS2 Server, European, English Version+++ |
| 17113978 | DS2 PC with Windows® Server OS+++ |
| 18105684 | iGas® Reader |
| 18105841 | Demand Flow Regulator w/ iGas® Pressure Switch (for 58L, 103L and 34L aluminum cylinders) |
| 18105866 | Demand Flow Regulator, 600 CGA w/ iGas Pressure Switch (for 34L steel cylinders) |
| 18105833 | Demand Flow Regulator, 590 CGA w/ iGas Pressure Switch (for 552L cylinders) |
| 18105858 | Demand Flow Regulator, 330 CGA w/ iGas Pressure Switch (for 650L cylinders) |
| 18102509 | Demand Flow Regulator, 5/8 UNF (for 58L, 103L and 34L aluminum cylinders) |
| 18103564 | Demand Flow Regulator, 600 CGA (for 34L steel cylinders) |
| 18103549 | Demand Flow Regulator, 590 CGA (for 552L cylinders) |
| 18103556 | Demand Flow Regulator, 330 CGA (for 650L cylinders) |
| 18105924 | 5-Port Gas Regulator Manifold Clamp |
| 18105932 | 6-Port Gas Regulator Manifold |
| 17113887 | Ethernet Cable, 5' (Cat5E network cable) |
| 17113895 | Ethernet Cable, 10' (Cat5E network cable) |
| 17113903 | Ethernet Cable, 25' (Cat5E network cable) |
| 17113911 | Ethernet Crossover Cable, 5' (Cat5E network cable) |
| 17113929 | 4-Port Ethernet Router |
| 17113945 | 5-Port Ethernet Hub |
| 17113952 | 16-Port Ethernet Hub |
| 17113960 | 24-Port Ethernet Hub |

+ Ordering Information

- A = 0
- B = number of iGas® Readers
- C = Power Cord Option 0 - US 1 - UK 2 - EU 3 - AUS 4 - ITA 5 - DEN 6 - SWZ

++ Includes (1) DS2, Computer (installed software: Windows® XP Professional, DSS and DSSAC), monitor, keyboard, mouse, 5-port Ethernet hub and cables.

+++ Includes keyboard and mouse. Monitor not included. DS2 not included.

**INDUSTRIAL
SCIENTIFIC**
www.indsci.com


Distributed by:
Air-Met Scientific Pty Ltd
Air-Met Sales/Service
P: 1800 000 744
F: 1800 000 774
E: sales@airmet.com.au

Air-Met Rental
P: 1300 137 067
E: hire@airmet.com.au
W: www.airmet.com.au


AMERICAS

Phone: +1-412-788-4353
1-800-DETECTS (338-3287) North America
Fax: +1-412-788-8353
info@indsci.com

ASIA PACIFIC

Phone: +65-6561-7377
Fax: +65-6561-7787
info@ap.indsci.com

EUROPE

Phone: +33-1-57-32-92-61
00-800-WORKSAFE (9675-7233) Europe
Fax: +33-1-57-32-92-67
customersupport@eu.indsci.com