



FUSION Smart Sound & Vibration Analyzer Technical Datasheet

Brand of ACOEM



Distributed by:
Air-Met Scientific Pty Ltd
Air-Met Sales/Service
P: 1800 000 744
F: 1800 000 774
E: sales@airmet.com.au

Air-Met Rental
P: 1300 137 067
E: hire@airmet.com.au
W: www.airmet.com.au



FUSION – TECHNOLOGY AT THE SERVICE OF YOUR PRODUCTIVITY

SIMPLY UNIQUE !

With FUSION, 01dB launches its new sound level meter: simply unique, designed to fulfil your needs in all situations. Easy to use, as effective in the hand as on a tripod, this instrument offers the best available technology to handle all measurement situations. Powerful functions, including vibration measurements, are integrated to meet your needs for on-site analysis, making FUSION the most innovative sound level meter and an exceptionally communicating tool, increasing your productivity!

Certified Class 1 solution according to IEC 61672, FUSION offers the highest standard in metrological quality for your data. Multitasking it gathers performance and simplicity within one single instrument. Connection to an intelligent wireless sensor FUSION can even record vibrations signals on 3 axes simultaneously with acoustic indicators and audio signals.

FUSION is a new member within 01dB ecosystem focused on improving your productivity. You will appreciate its simplicity of use, its degree of remote controllability and the power of its processing software



MAIN SPECIFICATIONS

FUSION presents the unique technical specifications:

- IEC 61672 Class 1
- Built-in preamplifier
- Free-field microphone type G.R.A.S.40CE
- Large dynamic range 118 dB
- Self-check system (CIC)
- Automatic calibrator detection
- High-definition color display
- Rubber side grips
- Windscreen claw
- All-in-one: Wi-Fi, 3G Modem, GPS...
- Remote control by web interface
- Parallel storage of all acoustic indicators
- Advanced triggers
- Metrological audio recording
- Wireless vibration signal recording in 3 axis
- 24-hour capacity
- Building Acoustics Module (option)
- Multiple processing software packages (dBTrait, dBFa, dBInside...)
- Numerous accessories (all weather case DSC01, outdoor unit DMK01...)

MAIN APPLICATIONS

FUSION is a multi-purpose sound level meter including all functions aimed at maximizing your productivity. It can be used as a control instrument and offers evaluation, analysis and monitoring capabilities application to noise and vibration measurement in the following fields of activity:

- | | |
|----------------------------------|---------------------------------|
| • Noise exposure | • Windmill noise |
| • Industrial plant noise mapping | • Recreational activities noise |
| • Urban noise | • Vibration of machines |
| • Construction site noise | • Vibration of structures |
| • Industrial noise | • Building acoustic |
| • Transportation noise | • ... |

PERFORMANCE AND SIMPLICITY

THE 01dB ECOSYSTEM

FUSION is a member the new 01dB product range sharing with DUO and CUBE the same ecosystem focused on improving your productivity. Being familiar with one of them just means mastering the other ones. Same built-in screen, same web interface, same accessories, same software tools... everything is designed in order to optimize the time you need to use these instruments.



SIMPLIFIED ERGONOMICS

FUSION can be used with its context keys and high-definition built-in colour screen. It is therefore possible to load a stored configuration, to start an acquisition, to mark an event and start an audio recording, to do a calibration and to access stored measurements ...

No more need for a computer keyboard to manage the whole set of measurement campaigns!



REMOTE COMMUNICATION

Using a communicating tool (smartphone, tablet, laptop...) you can access FUSION using a simple internet browser. Thanks to the embedded webserver FUSION offers direct access to any of the available functions: configuration, coding, acoustic calibration and electrical check, real time display of instant values...) without the need of further specific applications.

Remote connection is possible using Ethernet, Wi-Fi or 3G integrated modem (option). Therefore remote access to FUSION is possible from wherever you are.



GPS LOCATION

The built-in GPS allows FUSION to get measurement data include GPS location for easy visualization of the measurement position in dBTRAIT post-processing software.

In case of an unexpected displacement of FUSION, a user defined movement detection function will warn the operator by sending an SMS with the new geographical coordinates and the distance from the previous location (Need 3G Option).

SMART AND POWERFUL

FUSION measures noise and vibrations perfectly. Its powerful functions contribute to optimizing your operational efficiency: continuous audio recording, innovative trigger threshold definition, smart source recognition (building acoustics) advanced acoustic indicators, automatic calibrator detection, periodic electrical checks, remote setting changes and listening, etc.

WIRELESS IN YOUR OFFICE

Direct access to FUSION is possible from your office Wi-Fi network without additional software. Any of your collaborators can thus have hands on one or several FUSION instruments using Wi-Fi access.

Measured data are collected at a glance and you can already schedule your next measurement campaign!

01dB SOFTWARE: SO POWERFUL


To cover each application, 01dB offers a complete range of software tools: dBTrait (processing of data such as LAeq...), dBFa (advanced frequency analysis of measured data) or dBInside (processing of building acoustics measurements).

dBTrait is the most commonly used software program with the entire range of 01dB products. Initiated in the early 90's dBTrait was progressively improved over the years, taking also benefits from users feedback. It includes processing functions such as multiple indicators calculations, analysis results according to regulations as well as advanced coding capabilities which help identify noise sources.

dBInside has a new interface designed to enhance acoustics consultants' efficiency and productivity. The purpose is to reduce the time spent on:

- data entry related to the measurements (measurement location and details, etc.),
- calculation of standardized indicators (unique indices)
- generation of measurement reports.

To simplify your work, you can install 01dB software as many times as needed. Furthermore, there is no physical protection key to plug into your PC.



ACCESSORIES: MORE THAN A DETAIL!

Lateral grips make FUSION fit well within your hand. In addition a neoprene hand strap which can be mounted using the dedicated aluminium profile on the back of the instrument is adding even more security for a perfect handling of your instrument.



A fixation profile for tripod mounting is also part of the delivered set of accessories. FUSION can thus quickly and safely fixed on a tripod.




A windscreen claw also comes along with FUSION, which prevent losing the windscreen when performing measurements.

01dB, these accessories are genuinely useful and serve to improve your productivity day after day

GENERAL OVERVIEW



- 01 – Class 1 microphone
- 02 – Integrated preamplifier
- 03 – Colour display
- 04 – Keyboard
- 05 – Windscreen
- 06 – Removable hand grip
- 07 – Rail fastening

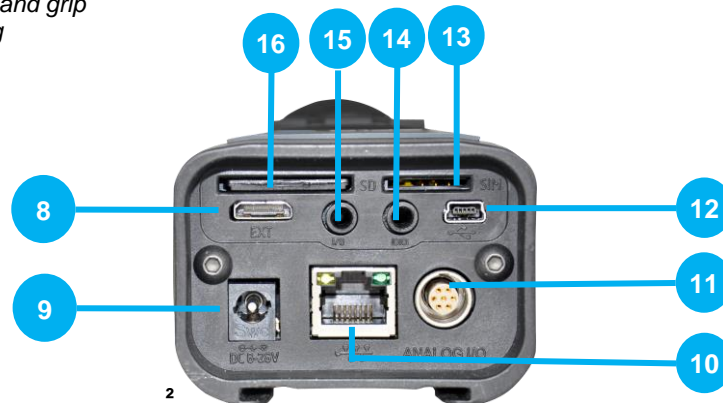

- 08 – Mini HDMI (weather station connection)
- 09 – DC 8-28V power supply input
- 10 – RJ45 Network
- 11 – External microphone preamplifier input and analogue output
- 12 – Mini USB
- 13 – SIM card slot
- 14 – RS232 input
- 15 – TTL input/output
- 16 – SD card slot

NO COMPROMISE WITH METROLOGY

ACOUSTIC CALIBRATION DETECTION

In order to simplify the deployment of FUSION in the field, an automatic function for the detection of a sound level calibrator is used to launch the calibration procedure without any action required from the user, other than powering up the calibrator.

When FUSION detects a stable level around the predefined calibration level, it automatically starts the calibration procedure. At the end of this procedure, the instrument indicates the new calculated sensitivity and prompts the user for validation, repeat or rejection of the calibration. Information provided is stored and added up to the historical data of the instrument.



MULTI-FREQUENCIES CHARGE INJECTION CHECK (CIC)

The built-in charge injection check allows testing the entire measurement chain, including the microphone of FUSION. It consists in injecting a sinusoidal charge (1 or 2 levels) into the microphone membrane, at the selected frequencies.

The principle is to collect reference levels (initialisation stage) and to check over time that the maximum deviation between the reference values and the measured values does not exceed a user defined level, typically set to 0.5 dB.

The controlled frequencies are 1000, 2000, 4000 Hz and a two user-defined frequencies. A multiple-frequency check offers the advantage of a better assessment of a possible degradation of the microphone membrane. The process lasts from 10 to 30 seconds and occurs between two measurement campaigns, so as to make their validation easy



REFERENCE DIRECTIONS

During a measurement with the instrument in hand, the sound level meter must be pointed at the source according to standard IEC 60651. This is why FUSION is delivered with a free field microphone for measurements with an angle of incidence of 0° with respect to its main axis.

The IEC-61672 standard requires a perfect control of the frequency response polar diagram, in particular at $\pm 30^\circ$. The fine shape of FUSION, along with its conical upper part, allows complying with this criterion.

During unattended monitoring measurement, multiple sources are usually measured with a random position with respect to the measurement point. Noise generated by ground transportation, leisure activities, construction sites is coming from all directions, although mainly the horizontal direction.

In this case FUSION may be equipped with the outdoor microphone unit DMK01 (see later on the dedicated section about accessories) especially designed to perfectly match applications where noise sources can be located all around the instrument, and more specifically coming from the horizontal direction.

Placed vertically, the outdoor microphone unit DMK01 is configured in FUSION for a propagation direction oriented 90° from its axis to perfectly meet the requirements of the IEC 61672 standard on sound level meters relative to noise incidence from the horizontal direction.

THREE MEASUREMENT MODES

SLM MODE (INTEGRATING SOUND LEVEL METER)

The integrating sound level meter mode allows for a simple but complete noise assessment over a period that includes overall global and spectral data as well as statistics. In case of an unexpected event (dog barking, police or ambulance siren) during a measurement a back erase function will reject the last 5 or 10 seconds of measurement

LOG MODE (INTEGRATING LOGGING SOUND LEVEL METER)

FUSION in LOG mode includes the storage of time histories. It is designed for experts familiar with the short term Leq method. Instantaneous values and spectra are stored at every logging period T.

When the trigger option is active, up to 5 different markers can be entered manually. In addition an event detector can be defined with limits based on 24 possible consecutive periods of the day. FUSION can record a (non-compressed) metrological audio signal simultaneously with the events. When an event occurs, a fast logging period set by the user becomes active. Finally, during acquisition, written time-stamped comments can be recorded in the measurement campaign

BUILDING ACOUSTIC MODE (OPTION)

In this mode, FUSION enables all acoustics technicians to respond to all building acoustics measurement requirements:

- L1 Source level
- L2 Receive level
- Li Impact noise level
- Lb Background noise
- T Reverberation time with interrupted source
- T Reverberation time with impulsive source.
- Le Equipment noise level




This FUSION module has an unrivalled feature set:

- Smart organization of measurements for effective post-processing
- Reuse of previous measurement data
- Automatic detection of the type of measurement performed
- Measurement quality indicators for reverberation time (ISO 3382 standard)
- Display of decay on the built-in display
- Storage of the time history and fast time history of all instantaneous and spectral parameters for each measurement
- Parallel recording of audio signal
- Three-button control keypad
- Remote control via a mobile device (smartphone, tablet, computer PC/MAC, etc.)
- Recording of audio comments
- Automatic distribution of measurements for each test
- Can be used with any sound source and tapping machine without requiring any control interface between the sound level meter and the source

The dBInside software completes this FUSION module with the following features:

- Ratings calculated immediately on data transfer, without user intervention
- On-the-fly calculation of ratings as changes are made
- Comparison with regulatory values
- One-click report covering all tests

Note: See the 01dB Building Acoustics Solution data sheet for more information.



POWERFUL DATA ACQUISITION

INNOVATIVE ACOUSTIC INDICATORS

On top of usual instantaneous data measured and stored (Leq, spectra, ...), FUSION allows for acquiring advanced indicators at logging period rate on user defined periods:

- Sliding LAeq with user defined sliding period,
- Sliding Ln with user defined sliding period,
- Exposure level with predefined background noise,

UNIQUE EVENT DETECTION FILTERS

In order to efficiently detect noise events (upon noise threshold or noise source recognition conditions), FUSION has a unique system of filters.

All instantaneous data measured at logging period rate can be used as criteria for triggers, including advanced indicators, frequency bands and weather data.

Each trigger is defined by 7 different parameters (start/stop noise levels, pre-/post-trigger duration...). Furthermore, it can be typically setup on an hourly basis, which allows creating up to 24 different triggers in a day.

An event can generate several actions: personalised SMS, audio recording, parallel measurement with fast logging period, TTL output ...



VIBRATION BUT DIFFERENTLY

INNOVATION

Sometimes classical sound level meters can interface with vibration sensors more or less successfully. In any case this requires a wired solution, using one single measurement channel and... reading the collected results on a dB scale dedicated for acoustics!

As a world premiere 01dB proposes FUSION the only sound level meter capable of recording and storing in parallel 3-axis vibrations, audio signals and all acoustic indicators.

3-AXIS WIRELESS VIBRATION

Relying on Wi-Fi connection FUSION interfaces with the wireless sensor WLS developed by ACOEM. This industrial sensor allows recording vibration signals on 3 axes (X, Y, and Z). The sensor's lifetime is 8 hours it can be recharged using a simple USB connection.

ACOUSTIC AND VIBRATION

FUSION allows recording vibrational signal on 1 (Z) or 3 axes simultaneously (X, Y and Z). What is more: FUSION can record and store in parallel 3-axis vibrations, audio signals and all acoustic indicators (instant values, spectral values...).

Audio and vibration signals recording is possible either manually using FUSION integrated keyboard, or remotely with a web interface connection to the instrument, or based on an acoustic trigger as part of the parameter definition of the current settings.

In fact it can be useful to further process vibration signals which correspond to a sound source with higher level than authorized.



AUTOMATIC POST-PROCESSING

In order to optimize the analysis, the acquired signals (audio and vibration, recorded with a metrological quality) can be analyzed “on the spot” once imported within dBTRAIT. Predefined analysis can be set by the user and assigned in dBTRAIT. Of course such parameters can be modified at any time.


As soon as the automatic processing is performed, computed results corresponding to each signal become available within dBTRAIT for further processing and analysis.

ADVANCED DATA POST-PROCESSING (LOGGER MODE)

MARKERS BETWEEN FUSIONS

Using several FUSION instruments synchronized by GPS on a single site allows for a detailed analysis of the recorded phenomena. It then becomes possible to clearly identify a car and/or train pass-by, a building site noise, an industrial noise, using multiple markers.

Analysis at the measurement point takes advantage of the information collected at the coding points (and thus validates that the incriminated sources are indeed active). Moreover, data post-processing using dBTRAIT will allow assigning markers from the coding points onto the measurement campaign collected at the measurement point.




SYNCHRONIZED LEVELS DIFFERENCE MARKERS

Analysis in dBTRAIT allows first to calculate the time history of the difference between the measurement point and the coding point.

The time history of such difference is then analysed and automatically marked in order to detect events during which the disturbing source(s) emerge(s) from the sum of all other noises sources.

The example besides illustrates an analysis of the time difference between measurement and coding points. Results in blue (positive difference: noise levels at the measurement point higher than at the coding point) indicate some non-significant noise at the measurement point, whereas results in yellow show a negative difference which highlight some significant noise at the coding point.



AND EVEN MORE

IMPORT AND EXPORT OF CONFIGURATION FILES

Measurement configurations can be stored, exported and imported for the benefit of the user: it becomes therefore possible to load measurement configurations from a FUSION instrument onto several ones, and thus run measurement campaigns relying on the same parameter settings for all instruments. This feature is also of temporary use to replace a FUSION while performing a periodic test at a laboratory.

DATA STORAGE MANAGEMENT

A retention period can be configured to automatically delete data older than a predefined past date.

REMOTE LISTEN-IN

Remote listen-in is possible with a voice & data subscription simply by dialling the telephone number of the SIM card in FUSION; FUSION will pick up the line after 2 tones and you can directly listen to the audio signal in real time.

MAIN ACCESSORIES (OPTION)

WLS WIRELESS VIBRATION SENSOR

FUSION interfaces in a very simple way to the WLS industrial wireless sensor. It allows recording vibrational signal on 3 axes (X, Y and Z) simultaneously with the recording of audio signals and all acoustic indicators (instant values, spectral values...).

The WLS sensor allows vibration recording on 1 axis (Z) or 3 axes simultaneously (X, Y and Z) with a frequency sampling of 12.8 kHz and a dynamic scale of 80g.

Battery operated (type Li-Ion) with an average lifetime of about 8 hours; it is rechargeable using a simple USB connection.

Several mounting accessories are available.



OUTDOOR MICROPHONE UNIT DMK01

FUSION external preamplifier input allows connecting an outdoor microphone unit of type DMK01 especially designed to separate the microphone from the instrument body.

This unit is composed of a stainless steel body, a dedicated preamplifier which allows using the microphone delivered with FUSION, a noise cone a specific windscreen and a dummy microphone designed to protect FUSION when its microphone is removed and used with the DMK01.

Specific electronic corrections are implemented in FUSION for the outdoor microphone unit DMK01 (embedded settings) in order to satisfy 0° and 90° reference directions.

Charge injection calibration check can also be operated from FUSION using DMK01 unit.



WEATHER STATIONS

A weather station can be interfaced to FUSION so as to be able to simultaneously measure and store noise and weather data.

It is possible to select between 2 VAISALA weather stations: WMT52 type (2 parameters) or WXT520 type (6 parameters). These two weather stations have the particularity of transducers without any moving parts to avoid any breakdown in case of harsh weather conditions.

A unique cable is used for the power supply and the data transfer. This cable is connected on the HDMI mini port of FUSION. The weather data logging period is defined as a multiple of the noise logging period.



	WMT52	WXT520
Wind speed	•	•
Wind direction	•	•
Air temperature		•
Relative humidity		•
Rain intensity		•
Barometric pressure		•

ALL WEATHER CASE DSC01

For mid- and long-term environmental noise and vibration measurements FUSION can be inserted into a DSC01 weather protected case. This case will provide complete protection against bad weather conditions and also deals as a protection against theft or vandalism.


This case can incorporate one or two DEB01 high capacity batteries providing an average battery life of 10 to 20 days.

The DSC01 case also includes several glands which allow you to use different cables (microphone extension cable, cable link with a weather station...) ensuring perfect sealing properties...



TAPPING MACHINE TM01

The **TM01** tapping machine consists of an aluminium frame standing on 3 rubber feet, the height of which can be adjusted. It includes a camshaft that drives 5 hammers with a mass of 500g each, set 10 cm apart one from another. The **TM01** machine allows for the hammers falling from a 40-mm effective height with a time interval of 100 ms between the drop of each hammer.

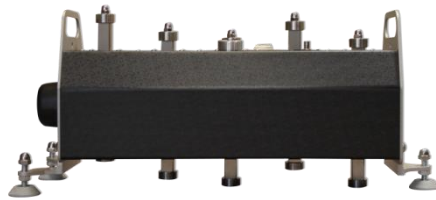

The **TM01** machine includes a lead-acid gel battery that allows for an optimum and standardised continuous operation time of 2 hours.

A pushbutton is used to manage the operation of the machine. Depending on the length of time the button is pressed, the following actions can be achieved:

- Power-up of the machine: Short push (< 850 ms)
- Operating for 5 min: Short push
- Operating for 20 min: Long push (850-2,500 ms)
- Turn-off of the machine: Long push (> 2,500 ms)

The **TM01** machine is supplied with a radio frequency remote control that allows for remote start and stop. The remote control is effective through the walls and floors normally built in residential and office buildings (the emitter's range in direct field is greater than 100 m).

OMNIDIRECTIONAL NOISE SOURCES LS01/LS02

01dB offers 2 omnidirectional sources, **LS01** and **LS02**, compliant with standards ISO 140 and ISO 3382.

Both sources have the same design. They consist of a 12-loudspeaker dodecahedron and contain each:

- a power amplifier
- a noise generator

Robust, compact and easy to implement, both sources **LS01/LS02** can be driven using a remote control. In addition to starting and stopping the sources, the user can control:

- the volume level by +/-2 dB steps or with a known gain (0 dB, -8 dB, -30 dB...).
- the type of noise: pink, white, swept sine according to different frequency ranges

The **LS01** source is delivered with a battery pack that provides more than 1 hour of operating time.



AVAILABLE OPTIONS

FSN2002000 - MULTISPECTRA OPTIONS

Activates multi-spectra measurement and storage:

- Type of spectrum: 1/1 or 1/3 octave
- Time weighting: Fast or Slow or none
- Simultaneous measurement and storage of two types of spectra (Leq and time weighting)

Stores spectral data at the logging period rate

If Trigger option (FSN2004000) activated:

- Possibility to store spectra at a faster logging period during events (down to 20 msec)

FSN2003000 – AUDIO RECORDING OPTION

Activates metrological audio recording:

- Selectable frequency sampling
- Manual trigger for recording start and stop directly from FUSION or remotely from the web interface
- User defined timer (periods and duration)

If Trigger option (FSN2004000) is activated

- Automatic audio recording during an event
- Synchronized audio recording simultaneously with manual markers

FSN2004000 – TRIGGER OPTION

Activates single trigger:

- Days of the week condition for event detection activation
- One of the instantaneous values (broadband or frequency bands) measured can be selected (including weather data) for each period; event detection is defined by;
 - User defined start trigger and end trigger levels
 - User defined pre-trigger
 - User defined post-trigger
 - Minimum time duration
- Up to 24 user defined periods within a day

Additional actions triggered during an event:

- SMS generation (with 3G Modem Option FSN2006000)
- TTL output (event or user defined duration)
- Audio recording (with Audio recording option FSN2003000) or vibration signal (with Option FSN2008000)
- Fast logging parallel measurement

FSN2005000 – ADVANCED INDICATORS OPTION

Measurement and storage of the following instantaneous indicators:

- Sliding LAeq (start time and end time, sliding duration)
- Sliding Ln (start time and end time, sliding duration)
- Exposure Level (start time and end time, predefined background noise level)

FSN2006000 – 3G MODEM ACTIVATION OPTION

Activates 3G modem for internet connection using 3G/GPRS/EDGE and UMTS/HSDPA networks:

- Full remote control and access with a smartphone, an internet tablet or a standard computer (Windows, Ios, MAC)
- FTP server for data transfer
- Automatic SMS notification on event detection (with Trigger option FSN2004000)
- Support of DTDNS dynamic IP address server
- SMS alarm on low battery (10%)
- SMS alarm on movement detected from initial location
- Possibility to call FUSION as a mobile phone to listen to real time noise from the microphone (voice subscription necessary)

FSN2007000 – WEATHER OPTION

Measurement and storage of weather data acquired by VAISALA weather stations types WXT520 (6 transducers) or WMT52 (2 transducers):

- User defined selection of parameters
- Altitude correction for barometric pressure
- User defined Logging period (as a multiple of the noise logging period)
- Real time display of weather information with the web interface (wind rose for wind direction, time history for wind speed, instantaneous values for the other weather parameters)

FSN2008000 – VIBRATION SIGNAL RECORDING OPTION

Activates metrological signal recording from the WLS sensor:

- Definition of the number of axes to be recorded: 1 (Z) or 3 (X, Y and Z)
- Manual trigger for recording start and stop directly from FUSION or remotely from the web interface
- User defined timer (periods and duration)

If Trigger option (FSN2004000) is activated

- Automatic audio recording during an event
- Synchronized audio recording simultaneously with manual markers

FSN2009000 - FUSION OPTION – BUILDING ACOUSTICS

For the **FUSION** Smart Noise & Vibration Analyzer, activation of parameters, acquisition and storage of building acoustics measurements (1/1 or 1/3 octave) including:

- spectrum of average levels in the source room during operation of the noise source
- spectrum of average levels in the receiving room during operation of the noise source
- spectrum of average levels in the receiving room during operation of the shock generator
- spectrum of average background noise in the receiving room
- reverberation time T20 & T30 with information regarding compliance of indicators with the ISO 3382-2 standard
- measurement of maximum equipment noise level

Parallel recording of audio signal, time history and fast logging time history of all instantaneous and instantaneous spectral parameters for each measurement

PACKAGES

OVERALL SPECIFICATIONS

All FUSION packages contain the minimum following specifications:

<ul style="list-style-type: none"> • Point to point Wi-Fi connection • Ethernet connection • Wi-Fi data transfer • Ethernet data transfer • GPS location • GPS or NTP time synchronization • Periodic electrical check (multi CIC 5 frequencies, 2 levels) • USB connection(mass storage) • SD card reader • 0° reference direction • Web interface for remote control 	<ul style="list-style-type: none"> • dBFileManager software for manual data transfer • SLM mode (Start/Stop) • LOG mode (time history) • Instantaneous values (up to 44 values in parallel) • Global values • Global statistical values (7 Ln values) • Back erase (mode SLM) • Timer functions : immediate, delayed, daily periodic
---	--

AVAILABLE PACKAGES

It is possible to order separately one or several options (for the delivery or as evolutions).

	FSN2001000 Logger	FSN2002000 Multispectra	FSN2003000 Audio Recording	FSN2004000 Triggers	FSN2005000 Advanced indicators	FSN2006000 3G Modem	FSN2007000 Weather	FSN2008000 Vibration signal recording	FSN2009000 Building acoustics
FSN3001000 Logger Wi-Fi	●	○	○	○	○	○	○	○	○
FSN3002000 Recorder Wi-Fi	●	○	●	●	○	○	○	○	○
FSN3003000 Analyzer Wi-Fi	●	●	○	○	○	○	○	○	○
FSN3004000 Expert Wi-Fi	●	●	●	●	○	○	○	○	○
FSN3005000 Advanced Wi-Fi	●	●	●	●	●	○	○	○	○
FSN3006000 Logger Wi-Fi /3G	●	○	○	○	○	●	○	○	○
FSN3007000 Recorder Wi-Fi/3G	●	○	●	●	○	●	○	○	○
FSN3008000 Analyser Wi-Fi/3G	●	●	○	○	○	●	○	○	○
FSN3009000 Expert Wi-Fi /3G	●	●	●	●	○	●	○	○	○
FSN3010000 Advanced Wi-Fi/3G	●	●	●	●	●	●	○	○	○
FSN3014000 Building Wi-Fi	○	○	○	○	○	○	○	○	●

● Included ○ Option

TECHNICAL SPECIFICATIONS

IEC class:

IEC 61672-1 ed. 2.0 (2013) (0° and 90° reference direction)
IEC 61620 (1995) NF EN 61260/A1 (2002)
Sound Level Meter, Integrating Sound Level Meter with storage, group X.

Type approval

LNE-27092 rev0 20th March 2014
PTB (soon available)

Dynamic range

21-139 dB (A, B), 26-139 dB (C), 31-137 dB (Z),
1 single range for a rated sensitivity of 40 mV/Pa

Linear operating range for A weighting (5 frequencies)

31,5 Hz : 26-98 dB
1 kHz : 23-138 dB
4 kHz : 23-138 dB
8 kHz : 23-134 dB
12,5 kHz : 23-130 dB

Dynamic range Peak

61-140 dBC, 1 single range

Time weightings

Slow, Fast, Impulse, Peak

Frequency weightings

X=A, B, C, Z; Y=S, F, I for LXeq and LXY

X=A; Y=S, F, I for LXYTd

X=C, Z for LXpk

Instantaneous broadband values stored

	LXY				LXYeq				LXYTd				LXYMinMax			
	A	B	C	Z	A	B	C	Z	A	B	C	Z	A	B	C	Z
F	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
S	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
I	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Pk				X												

LnsT (sliding Ln)

LAeqsT (sliding LAeq)

LAexPT (exposure level)

Instantaneous weather data stored

Wind speed [m/s]
Wind direction [°]
Rain intensity [mm/h]
Barometric pressure [hPa]
Air temperature [°C]
Humidity [%HR]

Noise logging period T

Mini 20ms - maxi 3600s, 5 ms steps
Short logging period: mini 20ms – max standard T, 5 ms steps.
Short logging period applicable during events
Short logging period must be a divisor of T

Weather logging period

Weather logging period is a multiple of T with a minimum of 1 second

Spectral analysis

Parallel measurement and storage of Leq and LY (Y=F, S, I)

Filters

1/1 (8Hz-16kHz) et 1/3 (6.3Hz-20kHz)

Statistics

7 selectable Ln in parallel from L1 to L99, 1 dB class
Samples for calculation: T if Leq or 20 ms if LXY, 0.1 dB resolution

Back erase

0, 5s or 10s, SLM mode only

Input high pass filter

0,3 Hz / 10 Hz

Reference directions

0° on internal input
0° and 90°, selectable built-in correction on external input (with a DMK01 external microphone)

Reference point for microphone

Centre of the protection grid (with or without nose cone)

Reference level

94 dB

Starting point for linearity tests

Reference level, i.e. 94 dB

Data storage modes

SLM (hand-held sound level meter) and LOG (logging sound level meter)

Audio recording

Uncompressed metrological signal, Fs = 51200 Hz
Sampling frequencies: 51200, 25600, 12800, 6400, 3200, 1600 Hz
Pre-trigger = 10s at Fs=51200 Hz
LEMO output connector

Vibration

Signal: Metrological, Fs = 12,800 Hz
Pre-trigger = 0 sec
1 (Z) or 3-axis(X, Y and Z)

Audio recording triggers

Simultaneously with events and manual (using FUSION integrated key and web interface for remote control)

Events (automatic coding)

1 user-definable event: codes 6 to 10
24 user-definable time periods

Triggers

Settings for pre-trigger, post-trigger, minimum time, end time
Types: on instant acoustic and weather values (except wind direction), instant spectral values, TTL input

Manual markers

On the instrument: 1 code "code 1"
On web interface: 5 codes: "codes 1 to 5"

Timers

Immediate, differed, daily periodic
Audio: periodic

Typical background noise (with 40CE mounted on FUSION)

	Background noise (dB)		Expanded uncertainty (k=2) (dB)
	Electronic	Total	
LpA,F	13	18.5	0.3
LpA,S			
LAeq			
LpC,F	13.5	19.1	
LpC,S			
LpZ,F	18.5	20.5	
LpZ,S			

Preamplifier

Integrated, not removable
External type PRE22 (included in DMK01) on external input (standard 10 m lemo extension cable)

Integrated keys

4 silent keys: on/stand-by/off and 3 multi-functions keys

Status indicators

LED red (overload)
LED blue (Wi-Fi connection)

LED green (power ON, blinking on on-going measurement, charge ON)

Display

High contrast colour screen 38*50mm resolution 320*240 pixels
3 sets of colours (day, contrast, night)
Display rate: 0.1s, Display resolution: 0.1dB

USB connection

Type 2.0; mass storage mode, charge on USB

Ethernet connection

Connector RJ45, Speed: 100 MB/s
DHCP mode

Wi-Fi Connection:

IEEE 801.11b, g
Point-to-point connection and infrastructure mode

Cellular network connection

Embedded modem 3.5G compatible with 4-band GSM/GPRS/EDGE and 3-band UMTS/HSDPA

Data connectivity

Integrated Network protected http server for web interface
Integrated FTP server for data access

Voice activation on cellular network

Possibility to call the instrument phone number with « voice » subscription to listen to the on-going measurement; Gain 20dB gain, signal compression in modem

SMS alarms

- On event: SMS text with FUSION serial #, location, date and time, user defined text, IP address:http port
- On low battery (10%): SMS text with FUSION serial #, location, date and time, % remaining battery
- On movement: SMS text with FUSION serial #, location, date and time, GPS coordinates, distance from previous location, IP address:http port (the alarm trigs if FUSION has moved more than the user defined distance)

Automatic SMS actions

- Sending "IP" by SMS to instrument makes it reply by sending an SMS with instrument serial #, location, date and time, IP:port address and automatically sends a new SMS at every new IP address in case of floating IP

Actions on SMS sent to the instrument

- On SMS sent "IP", the instrument replies by sending an SMS with the instrument serial #, location, date and time, IP:port address
- On SMS sent "stop", the instrument stops replying new SMS if IP has changed
- On SMS "reboot", the instrument reboots to establish a new connection and replies with an SMS with instrument serial #, location, date and time, IP :port address

Web interface refresh rate webpages

Standard: twice per second
Mobile: once per second

Analogue output

Audio output A, B, C or Z (+/-10Vpp R=200Ohms)
Adjustable gain: 0, 10, 20, 30, 40, 50 dB

Electrical check

Programmable periodicity: 1, 2 or 4 times per day (0h,0h-12h, 0h, 6h, 12h, 18h)
3 pre-set frequencies (1000 Hz, 2000 Hz, and 4000 Hz) and 2 user-defined frequencies (between 10 Hz and 20 kHz)
2 user-defined excitation levels, maximum level 5 V (100%)

External microphone input

For DMK01, PRE22 (R = 560kOms / 22Vpp (+/- 11V)

TTL output

R = 100 Ohms / 0 / 5V

TTL input

R = 100 kOhms / 0...1V = "0" 1.8...5V = "1"

Battery

Type lithium polymer
Voltage 3.7V
Capacity 6750 mAh
Non removable, charging time approximately 3 hours

Typical power consumption

Without communication (screen switch off): < 1200 mW
+ Wi-Fi & screen switch on: < 1800 mW
+ Modem: <3800 mW

Operating lifetime

20 hours with Wi-Fi connection (during 10% of measurement time)
15 hours with active 3G connection (during 10% of measurement time)
(for temperatures ranging from 10°C to 50°C, in LOG mode with IT = 1 s, fine IT 100 ms, 1/3 octave and audio recording on threshold during 10% of the measurement time)

External power supply

DC 8 to 28 V on charge input
DC 5 V on USB input (slow charge)

Memory

SD, SDHC or SDXC card, 2 GB or higher (2GB standard delivery) for measured data and signals. Minimum recommended requirement: ≥ class 10. Please note only SD cards provided by 01dB should be used.

01dB cannot be held responsible for data loss if the SD card used is not delivered by 01dB.
Measured data stored on the SD card every 10 seconds.

Non-volatile memory for configurations, system log (500), calibration data (500) and electrical checks (500)

Clock

GPS PPS, error < 50 milliseconds
Internal clock, error < 0.5 s/24 hours

Localization

Automatic with integrated GPS
Information stored with measurement campaigns

Warm-up time

From power off: < 25 seconds

Operating temperature:

-10°C to +50°C

Humidity

IEC 60068-2-78: damp heat: 90% HR (non condensing at 40°C)

Electromagnetic compatibility

According to Directive 2004/108/EC
NF EN 61000-6-1 NF EN 61000-6-2 NF EN 61000-6-3 NF EN 61000-6-4 (2001)
ETSI EN 300 328 V1.5.1 (2004)

Protection

IP40 in standard use

Influence of vibration

Use with no outdoor microphone:

- For mechanical vibration of an acceleration level of 1 m/s² perpendicular to the microphone diaphragm, at frequencies 31.5 Hz, 63 Hz, 125 Hz, 250 Hz, 500 Hz, 630 Hz, 800 Hz and 1000 Hz: the lower limit of the linear operating domain for A-weighting becomes 80 dB.
- For mechanical vibration of an acceleration level of 1 m/s² parallel to the microphone diaphragm, at frequencies microphone diaphragm, at frequencies 31.5 Hz, 63 Hz, 125 Hz, 250 Hz, 500 Hz, 630 Hz, 800 Hz and 1000 Hz: the lower limit of the linear operating domain for A-weighting becomes 60 dB.

Use with outdoor microphone unit DMK01:

- For mechanical vibration of an acceleration level of 1 m/s^2 perpendicular to the microphone diaphragm, at frequencies microphone diaphragm, at frequencies 31.5 Hz, 63 Hz, 125 Hz, 250 Hz, 500 Hz, 630 Hz, 800 Hz and 1000 Hz: the lower limit of the linear operating domain for A-weighting becomes 75 dB.

Weight and dimensions

775 g

H x L x P: 300 x 70 x 52 mm

Optional Accessories

- Weatherproof external charger IP67 (10m cable)
- Weather station VAISALA type WMT52 specific for the instrument (2 parameters: wind speed and direction)
- Weather station VAISALA type WXT520 (6 parameters: wind speed and direction, rain intensity, relative humidity, air temperature, barometric pressure, Connection cable between weather station and the instrument by mini HDMI cable)
- Outdoor microphone unit type DMK01 including preamplifier type PRE22, 10 m cable and nose cone. The use of RAL135 10 m cable does not need any particular correction.
- All weather case DSC01 with option 1 battery (10-days) or 2 batteries (20-days)
- Wireless vibration sensor 3-axis (X, Y, Z) 80g, Weight 373 g, Dimension Ø42 x H116 mm, 8h battery life.

Connecting these accessories has no influence on measurements

Building Acoustics Module (option)

Product Code

FSN2009000: Building option for FUSION

Frequency-based analysis

1/1 or 1/3 octave, 50 to 5000 Hz

Levels L_1 , L_2 , L_i (Emission, Reception, Impact noise)

Calculation of the mean spectrum L_{Zeq} over the specific coding duration, detected automatically (source on duration)

Background noise level L_b

Calculation of the mean spectrum over the entire measurement duration

Integration times (IT)

1 second; 20 milliseconds

Maximum averaging time for spectra L_1 , L_2 , L_b and L_i

120 seconds

Maximum measurement time for equipment noise

600 seconds

Simultaneous audio recording

Sampling frequency: 51.2 kHz, 25.6 kHz, 12.8 kHz, 6.4 kHz, 3.2 kHz, 1.6 kHz

Equipment noise levels

Selection of the maximum level for one of the following parameters: L_{XYMax} where X = A, C or Z and Y = F, S or I

Calculation of reverberation times

Fine IT 20 ms for decay analysis

Simultaneous calculation of T20 and T30

Automatic detection of interrupted or pulsed noise sources

Schroeder integration for pulsed sources

Estimate by least squares approximation

Calculation of quality indicators (ISO 3382)

Name	Indicator	Description
N	Background noise level too high*	Low dynamic range (between 41 and 45 dB for T30; between 31 and 35 dB for T20)
D	Calculation impossible*	Insufficient dynamic range ($< 41 \text{ dB}$ for T30; $< 31 \text{ dB}$ for T20)
<	Reverberation time too low	$Tr < 0.24 \text{ seconds}$ (scaled by logging period = 20 ms)
ξ	Non-linearity*	Non-linearity parameter $\xi > 1\%$
C	Curvature*	$C > 10\%$ or $C < 0$; see [1] appendix B.3
L	Linearity of the sound source linearity	Difference between adjacent 1/1 or 1/3 octave bands $> 6 \text{ dB}$

*: ISO 3382-2 standard indicator

Invalid indicators displayed on the Tr spectrum and stated on decay

Audio comments

Used to store a voice comment, with the same sampling frequency as for the measurement

PC Software

dBInside

DELIVERABLE AND ACCESSORIES

The standard package (FSN1001000) of FUSION includes the following items:



FUSION with 40CE microphone



Handle



Profile for tripod mounting



Windscreen



Windscreen claw



Packaging




SD card 2Go




AC Power supply



USB cable



Metrological documentations



CD-ROM with User manual

ACOEM

Smart monitoring, diagnosis & solutions

In today's complex and increasingly fast-moving world, it is essential to keep risks under control. **ACOEM** helps customers in the industrial, environmental and defense sectors make the right decisions and take the right actions:

- to ensure the productivity and reliability of industrial machines
- to prevent noise and vibration pollution
- to protect personnel, sites and vehicles in military theaters of operation
- to contribute to the development of effective, robust & noiseless products

All around the world, **ACOEM**'s 400 employees are at the forefront of innovation in monitoring, maintenance and engineering through **01dB**, **ONEPROD**, **FIXTURLASER** and **METRAVIB**.

For more information, visit our website at www.acoemgroup.com



200 Chemin des Ormeaux
69578 LIMONEST – FRANCE
Tel. +33 (0)4 72 52 48 00

www.acoemgroup.com

Asia
Tel. + 66 (2) 7112 293 – Fax : + 66 (2) 7112 293

South America
Tel. + 55 (11) 5089 6460 – Fax : + 55 (11) 5089 6454
