ce Air-Met Rental
P: 1300 137 067
E: hire@airmet.com.au
W: www.airmet.com.au

Hydrocarbon Recovery Systems



Geotech Large Diameter Dangle Scavenger

The Geotech Large Diameter Dangle Scavenger is a unique separating and pumping system designed for the efficient recovery of hydrocarbon product from the surface water. The system is portable and is electrically safe for use in hazardous locations. The heart of the Dangle Scavenger is a floating oil/water separator which passes recovered oil to a suspended pump and control assembly. Actual separation of oil or other hydrocarbons from water is effected by a mesh screen located in the floating buoy assembly. This screen is specially treated to pass oil and repel water.

FEATURES

- Efficiently separates hydrocarbons from water in-situ using an oleophilic/hydrophobic membrane
- Intake floats on the water surface
 Automatically adjusts as water level fluctuates
- · Intrinsically safe explosion-proof design
- Portable self-contained design
 For quick and easy startup, ideal for emergency response
- Durable construction for harsh field conditions
- · Recovers hydrocarbons to a sheen
- Salt water and aromatic hydrocarbon models available.


OPERATION

The Geotech Large Diameter Dangle Scavenger has a floating collection element or "buoy" designed to float precisely at the oil-water interface. This allows hydrocarbons to flow into a collection basin within the unit automatically. This unit is so effective that product layers can be reduced to a sheen.

When approximately one liter of hydrocarbons collects in the buoy base, a float switch is activated, turning the pump on. Thus, water-free product is automatically pumped into a recovery tank. A water sensing switch is also located within the buoy. Should water enter the buoy, a density switch is activated, shutting off the pump and activating an alarm light. This automatic feature prevents recovered hydrocarbons from being contaminated by water.



Large Diameter Dangle Scavenger system with optional case

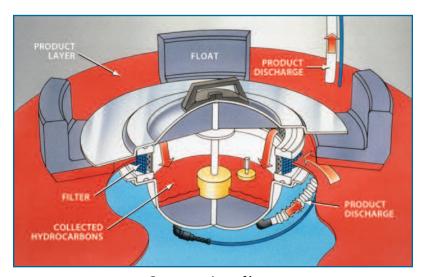

Cut-away view of buoy

CALL GEOTECH TODAY (800) 833-7958

Geotech Environmental Equipment, Inc.
2650 East 40th Avenue • Denver, Colorado 80205
(303) 320-4764 • (800) 833-7958 • FAX (303) 322-7242
email: sales@geotechenv.com website: www.geotechenv.com

Hydrocarbon Recovery Systems



Geotech Large Diameter Dangle Scavenger

SPECIFICATIONS

Applications Trenches, manholes, small bodies of water, and wells 24" (61.5 cm) in diameter or larger,

with fluctuating water table levels

Product Recovery Rate Up to 4 gpm (15.4 lpm) @ 65 PSI (4.5 bar)

Operation Requirements Custom applications

Dimensions/Weight for Buoy Assembly

18.5" dia. x 10" high x 5" draft/11 lbs. (47.4cm x 25.6cm x 12.8 cm/5kg)

Power Requirements

115/230 VAC 50/60 HZ/600 Watt

OilWater Separation Oleophilic/hydrophobic filter membrane

Base System 18.5" (47cm) diameter product collection buoy assembly with lid, 100 mesh cartridge for light oils, 20' (6m) of


control cable and 12.5' (3.75m) of input hose, tankfull probe with 25' (8m) of cable, 20' (6m) of $\frac{3}{4}$ " output hose, with grounding clip, explosion proof control panel with $\frac{1}{4}$ hp pump/motor, 115/230VAC 25' (8m) power cord

with plug. It also includes a spare parts kit (fuses, lid spacers, Viton washer)

Options Spare filter membrane (mesh size 60), spare filter membrane (mesh size 100), totalizer, salt water duty system,

aromatic duty system, winch assembly, and modification for deep wells.

Custom cable, hose lengths available (consult Geotech for application assistance).

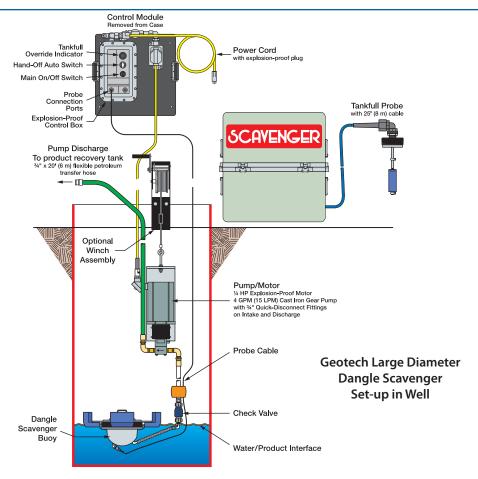

CALL GEOTECH TODAY (800) 833-7958

Geotech Environmental Equipment, Inc.

2650 East 40th Avenue • Denver, Colorado 80205 (303) 320-4764 • (800) 833-7958 • FAX (303) 322-7242 email: sales@geotechenv.com website: www.geotechenv.com