



OLCT10N

Presentation

The OLCT 10N is a digital gas detector designed for detection of the most common gases in commercial and light industrial applications. Intended for use in combination with the MX 43, the OLCT 10N provides a fast and accurate response. Up to 32 detectors can be connected on the same digital line or distributed on 8 lines. All transmitter information is received by the controller in less than 1 second.


Non-intrusive operator interface requires only a simple magnetic wand and allows one man calibration without opening the enclosure, and calibration information, such as span reserve, is stored in the MX43.

The OLCT 10N is IP65 and ATEX 3 GD certified, for use in ATEX 2 and 22 zones, and is water- and dustproof.



- Detection of combustible gases, toxic gases or oxygen
- Digital technology
- Non-intrusive calibration
- Cost savings on wiring installation

Configuration example

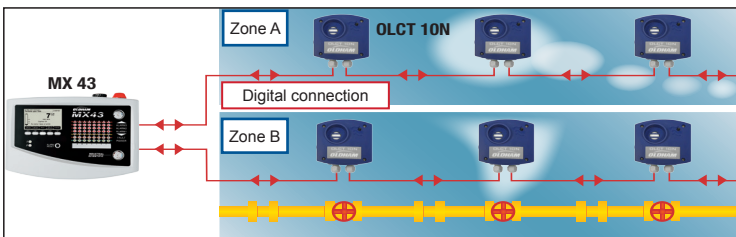

Certifications



Better detection. Better protection.




Distributed by:
Air-Met Scientific Pty Ltd

Air-Met Sales/Service
P: 1800 000 744
F: 1800 000 774
E: sales@airmet.com.au

Air-Met Rental
P: 1300 137 067
E: hire@airmet.com.au
W: www.airmet.com.au

Technical Specifications

Détecteur numérique OLCT 10N		
Range	CH ₄ , C ₃ H ₈ , C ₄ H ₁₀ , H ₂ O ₂ (> 2 years) O ₂ (5 years) CO H ₂ S NO NO ₂ NH ₃ CO ₂	0-100 % LIE (-20°C à + 55°C) 0-30 % vol (-20°C à + 50°C) 0-30 % vol (-40°C à + 50°C) 0-300 ppm / 0-1000 ppm (-20°C à + 50°C) 0-30 ppm / 0-100 ppm (-20°C à + 50°C) 0-100 ppm / 0-300 ppm (-20°C à + 50°C) 0-10 ppm / 0-30 ppm (-20°C à + 50°C) 0-100 ppm / 0-1000 ppm (-20°C à + 40°C) 0-5000ppm / 0-5% vol / 0-100% vol (-40 à + 50°C)
Output	RS485 Modbus, proprietary protocol	
Power supply	12-30 Vcc	
Consumption	Electrochemical sensor: Catalytic sensor : CO ₂ Infrared sensor:	2.5 mA in normal operation @ 24 Vdc 50 mA in normal operation @ 24 Vdc 20mA in normal operation @24Vdc
Calibration	Non-intrusive	
Cable inlet	2 PE M16, diamètre 4 à 8 mm	
Cable inlet	2 x M16 cable entries, outer diameter 4 to 8 mm Up to 32 detectors at 1000 m with a 0.9 mm ² (AWG 18) core size cable	
Dimensions (LxHxW)	118x110x60 mm	
Materials	ABS, UV and shocks resistant	
Ingress protection	IP65	
Approvals	 II 3 GD - INERIS 11ATEX3023X - IECEx 11.0029X Ex nA nC IIC T4 Gc for explosimetric versions / Ex nA IIC T4 Gc for others (except CO2 versions) Ex tc IIIC T135°C Dc -20°C < Ta < +55°C Electromagnetic compatibility according to EN50270	

Ordering information

Part Number	Description
OLCT10N-001	Digital transmitter OLCT 10N, range 0-100% LEL CH ₄
OLCT10N-003	Digital transmitter OLCT 10N, range 0-100% LEL H ₂
OLCT10N-004	Digital transmitter OLCT 10N, range 0-100% LEL C ₃ H ₈
OLCT10N-005	Digital transmitter OLCT 10N, range 0-100% LEL C ₄ H ₁₀
OLCT10N-200	Digital transmitter OLCT 10N, range 0-30% vol O ₂ (durée de vie 2 ans)
OLCT10N-272	Digital transmitter OLCT 10N, range 0-30% vol O ₂ (durée de vie 5 ans)
OLCT10N-204	Digital transmitter OLCT 10N, range 0-300 ppm CO
OLCT10N-205	Digital transmitter OLCT 10N, range 0-1000 ppm CO
OLCT10N-213	Digital transmitter OLCT 10N, range 0-30 ppm H ₂ S
OLCT10N-214	Digital transmitter OLCT 10N, range 0-100 ppm H ₂ S
OLCT10N-216	Digital transmitter OLCT 10N, range 0-100 ppm NO
OLCT10N-217	Digital transmitter OLCT 10N, range 0-300 ppm NO
OLCT10N-219	Digital transmitter OLCT 10N, range 0-10 ppm NO ₂
OLCT10N-220	Digital transmitter OLCT 10N, range 0-30 ppm NO ₂
OLCT10N-231	Digital transmitter OLCT 10N, range 0-100 ppm NH ₃
OLCT10N-232	Digital transmitter OLCT 10N, range 0-1000 ppm NH ₃
OLCT10N-252	Digital transmitter OLCT 10N, range 0-5000 ppm CO ₂
OLCT10N-239	Digital transmitter OLCT 10N, range 0-5% vol CO ₂
OLCT10N-241	Digital transmitter OLCT 10N, range 0-100% vol CO ₂

Accessories

Shock guard protector (2123717)

OLCT 10N calibration tool kit (6331163)

The OLCT 10N is the ideal solution for safe areas or zone 2 (22) ATEX locations.

As an ISO 9001 & ISO 14001 approved company, OLDHAM quality assurance programmes demand the continuous assessment and improvement of all OLDHAM products. Information in this leaflet could thus change without notification and does not constitute a product specification. Please contact OLDHAM or their representative if you require more details.

EMEA
Oldham - France
Tel : +33 (0) 3 21 60 80 80
Fax : +33 (0) 3 21 60 80 00
info@oldhamgas.com

AMERICAS
Sales Office - USA
Tel : +1 713-559-9200
Fax : +1 281-292-2860
sh-sale@tycointl.com

ASIA PACIFIC
Oldham - China
Tel : +86 21 3127 6373
Fax : +86 21 3127 6365
sales@oldhamgas.com



www.TycoGFD.com / Copyright © 2016 Tyco Gas & Flame Detection. / All rights reserved. / GF-00226A-EN



Learn more:
www.TycoGFD.com