





Operating Instructions

863 Valley View Road, Eighty Four, PA 15330 USA
Tel: 724-941-9701 Fax: 724-941-1369 e-mail: skctech@skcinc.com
www.skcinc.com

Battery Pack for AirChek 52 Sample Pumps

1. To remove a battery pack, loosen two security screws on bottom of pump case and allow them to fall to the out position.
2. Pinch battery pack release arms and pull the bottom half of the pump case away from the top half.
3. To install a battery pack, align arms on top half of case with slots on either side of the new battery pack housing. Ensure the back of the battery pack with the charging jack is on the same side as the belt clip.
4. Slide battery pack up until arms click into place.
5. Push each security screw into the battery pack housing and tighten.
6. Charge the new battery pack using the charging jack on the back of the battery pack.

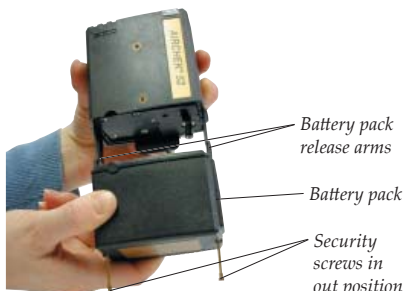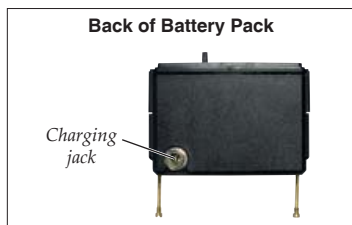

- ❗ ***Use of a repaired or rebuilt battery pack voids any warranty and the UL Listing for intrinsic safety.***
- ❗ ***Do not charge or operate pump from charger in hazardous locations!***
- ❗ ***Use only an SKC-approved charger and battery pack designed for the AirChek 52 Sample Pump to ensure reliable performance. Failure to do so voids intrinsic safety and any warranty.***
- ❗ ***Use of any device other than the approved battery pack to power the pump voids the UL Listing for intrinsic safety and any warranty.***
- ❗ ***Failure to follow warnings and cautions voids any warranty.***

SKC Limited Warranty and Return Policy

SKC products are subject to the SKC Limited Warranty and Return Policy, which provides SKC's sole liability and the buyer's exclusive remedy. To view the complete SKC Limited Warranty and Return Policy, go to <http://www.skcinc.com/warranty.asp>.