

1. PERFORMANCE


- 1) Measuring range : 0.5-30 %
- Number of pump strokes : 1 (100mℓ)
- 2) Sampling time : 1 minute/1 pump stroke
- 3) Detectable limit : 0.01 %
- 4) Shelf life : 3 years
- 5) Operating temperature : 0 ~ 40 °C
- 6) Temperature compensation : Necessary (See "TEMPERATURE CORRECTION TABLE")
- 7) Reading : Direct reading from the scale calibrated by 1 pump stroke
- 8) Colour change : Pink → Blue · Brownish green

2. RELATIVE STANDARD DEVIATION

RSD-low : 10 % RSD-mid. : 5 % RSD-high : 5 %

3. CHEMICAL REACTION

Ammonia reacts with Cobalt chloride (II) and complex salt is produced.



4. CALIBRATION OF THE TUBE

STANDARD GAS CYLINDER METHOD

5. INTERFERENCE AND CROSS SENSITIVITY

Substance	ppm	Interference	ppm	Coexistence
Hydrogen sulphide FIG.1	0.01%	Whole layer is discoloured to Black.	0.3 %	If the maximum end point of the stain is discernable, the accuracy of readings is not affected.
Amines				The accuracy of readings is not affected.

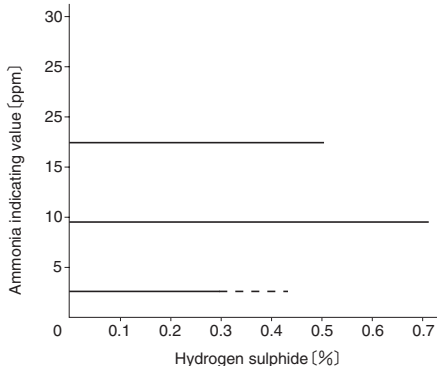


FIG.1 Influence of Hydrogen sulphide

TEMPERATURE CORRECTION TABLE

Tube Readings (%)	Corrected Concentration (%)				
	0 °C (32 °F)	10 °C (50 °F)	20 °C (68 °F)	30 °C (86 °F)	40 °C (104 °F)
30	—	35.0	30.0	27.0	25.0
25	35.0	30.0	25.0	23.0	21.0
20	28.0	24.0	20.0	18.0	17.0
15	22.0	18.0	15.0	13.0	12.0
10	15.0	12.0	10.0	9.0	8.0
5	8.0	6.0	5.0	4.5	4.0
2	3.0	2.5	2.0	1.9	1.8
1	1.2	1.2	1.0	1.0	0.9
0.5	0.5	0.5	0.5	0.5	0.5

Distributed by:
Air-Met Scientific Pty Ltd



Air-Met Sales/Service
P: 1800 000 744
F: 1800 000 774
E: sales@airmet.com.au

Air-Met Rental
P: 1300 137 067
E: hire@airmet.com.au
W: www.airmet.com.au