

# Geotech PRC Passive Skimmer

The Geotech Product Recovery Canister (PRC) is a passive skimmer designed to recover product-only (LNAPL) layers down to a sheen. The PRC features a floating intake that adjusts for groundwater fluctuations, a product canister for measuring recovered volumes, and a product drain valve designed to eliminate fluid splattering.

## FEATURES


- Floating oleophilic intake auto adjusts for water level changes
- Ideal for extreme environments and low recovery applications
- Configured for dedicated or portable installations
- Choice of floating intake mesh sizes

### 2" PRC System:

- 12" (30.5 cm) effective buoy travel
- Oleophilic intake – 60 or 100 mesh
- Transparent collection canister
- Product drain valve
- 25' of suspension cable with adjustable clamp
- Optional protective SS screen

### 4" PRC System:

- 16" (40.6 cm) effective buoy travel
- Oleophilic intake (60 or 100 mesh)
- White collection canister
- Product drain valve
- 25' of suspension cable with adjustable clamp
- Slotted protective PVC screen

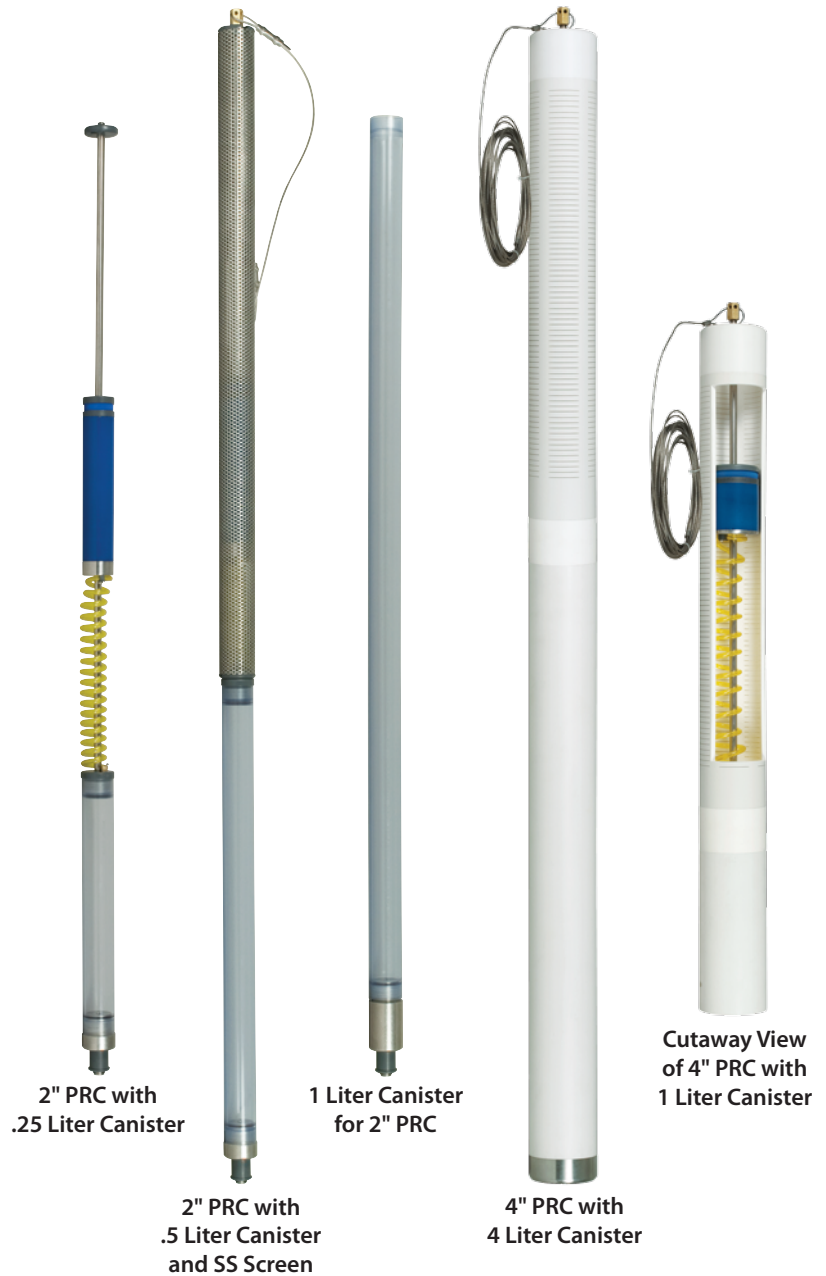

2" PRC with  
.25 Liter Canister

1 Liter Canister  
for 2" PRC

2" PRC with  
.5 Liter Canister  
and SS Screen

4" PRC with  
4 Liter Canister

Cutaway View  
of 4" PRC with  
1 Liter Canister

**CALL GEOTECH TODAY (800) 833-7958**

### Geotech Environmental Equipment, Inc.

2650 East 40th Avenue • Denver, Colorado 80205

(303) 320-4764 • FAX (303) 322-7242

email: sales@geotechenv.com • website: www.geotechenv.com



Distributed by:  
Air-Met Scientific Pty Ltd  
Air-Met Sales/Service  
P: 1800 000 744  
F: 1800 000 774  
E: sales@airmet.com.au

Air-Met Rental  
P: 1300 137 067  
E: hire@airmet.com.au  
W: www.airmet.com.au

geotech\_prc.qxp 11/03/20

# Geotech PRC Passive Skimmer

## SPECIFICATIONS

### 4" PRC

	1 Liter	3 Liter	4 Liter
<b>Dimensions</b>	37.0" L x 3.5" OD (94cm x 9cm)	53.0" L x 3.5" OD (135cm x 9cm)	60.0" L x 3.5" OD (152cm x 9cm)
<b>Empty Weight</b>	8 lbs. (3.7kg)	15 lbs. (6.8kg)	16 lbs. (8.2kg)
<b>Full Weight</b>	9.5 lbs. (4.3kg)	19 lbs. (8.6kg)	25.5 lbs. (11.6kg)
<b>Capacity</b>	.26 gal.	.8 gal.	1.06 gal.
<b>Min. Water Depth Required</b>	18.5" (47cm)	35.0" (89cm)	43.0" (109cm)
<b>Materials (All)</b>	Stainless steel, brass, and engineered plastics		

### 2" PRC

	0.125 Liter	0.25 Liter	0.5 Liter	1 Liter
<b>Dimensions</b>	43.5" L x 1.75" OD (110cm x 4.4cm)	49.0" L x 1.75" OD (149cm x 4.4cm)	59.5" L x 1.75" OD (151cm x 4.4cm)	82.5" L x 1.75" OD (210cm x 4.4cm)
<b>With Optional SS Screen</b>	43.5" L x 1.88" OD (110cm x 4.8cm)	49.0" L x 1.88" OD (149cm x 4.8cm)	59.5" L x 1.88" OD (151cm x 4.8cm)	82.5" L x 1.88" OD (210cm x 4.8cm)
<b>Empty Weight</b>	2.9 lbs. (1.3kg)	3.1 lbs. (1.4kg)	3.5 lbs. (1.6kg)	5.2 lbs. (2.4kg)
<b>With Optional SS Screen</b>	4.3 lbs. (2.0kg)	4.5 lbs. (2.0kg)	4.9 lbs. (2.2kg)	6.6 lbs. (3.0kg)
<b>Full Weight</b>	3.1 lbs. (1.4kg)	3.5 lbs. (1.6kg)	4.3 lbs. (2.0kg)	6.7 lbs. (3.0kg)
<b>With Optional SS Screen</b>	4.5 lbs. (2.1kg)	4.9 lbs. (2.2kg)	5.7 lbs. (2.6kg)	8.1 lbs. (3.7kg)
<b>Capacity</b>	0.035 gal.	0.07 gal.	0.13 gal.	0.26 gal.
<b>Min. Water Depth Required</b>	23.5" (60cm)	29.0" (74cm)	39.5" (100cm)	62.0" (157cm)
<b>Materials (All)</b>	Stainless steel, brass, and engineered plastics			

## ACCESSORIES

**Expandable Locking Well Cap:** . . . . . 2", 4", 6", or 8"

**Hanger Bracket:** . . . . . Universal

**Additional Suspension Cable:** . . . . . 3/32" per foot



**CALL GEOTECH TODAY (800) 833-7958**

**Geotech Environmental Equipment, Inc.**  
 2650 East 40th Avenue • Denver, Colorado 80205  
 (303) 320-4764 • FAX (303) 322-7242  
 email: sales@geotechenv.com • website: www.geotechenv.com