

SMART3G Gas Detectors



Distributed by:
Air-Met Scientific Pty Ltd
Air-Met Sales/Service
P: 1800 000 744
F: 1800 000 774
E: sales@airmet.com.au

Air-Met Rental
P: 1300 137 067
E: hire@airmet.com.au
W: www.airmet.com.au

- **Non-intrusive one man calibration (display version)**
- **Easy sensor replacement**
- **Wide range of sensors and detectable gases**
- **Standard 4-20 mA 3 wires output**
- **Wide range of accessories for installation and maintenance**
- **Zero tracking and system self-diagnosis**
- **ATEX and IECEx certified**

APPLICATION

- **Refineries**
- **Compressor stations**
- **Pharmaceutical plants**
- **Petrochemical Plants**
- **Gas turbines**
- **LNG/LPG storage facilities**
- **Laboratories**



SMART3G gas detectors are employed to detect flammable compounds (%LEL), toxic compounds (ppm), refrigerant gases and Oxygen contents for both its depletion and enrichment in classified areas.

The Pellistor sensors employed for the flammable Gas detection show excellent output linearity up to 100% LEL. For aggressive atmospheres, where the Pellistor sensors would be seriously damaged, Sensitron developed a range of detectors employing industrial grade Infrared sensors: IR sensors are poison free and this grants a higher accuracy and a longer lifetime to the cell. For the toxic gas detection, Sensitron has operated a reliable selection among the most performing electrochemical cells to supply units representing the state of the art in toxic gas detection.

The SMART3G line has been designed to offer a wide range of alternatives that grant customers the best solution to their requirements. SMART3G-C has been specifically designed to offer high performance products for industrial applications.









SMART3G-D have been designed to meet with tougher industrial requirements and offer a 4 digits back-lit display and 5 mode status LEDs for the gas concentration reading. They feature non-intrusive magnetic calibration for an accurate and easy calibration via Hall-effect switches, without opening the instrument and declassifying the area. SMART3G detectors are SIL2 HW tested.

SMART3G detectors have the following certifications:

- ATEX Group II 2G, 2GD, 3G & GD.
- IECEx
- ATEX Group I M2 (refer to specific data sheet)



Order P/N and protections.

Flammable gases (% LEL)	G-D3 Ex II 3G	G-D2 Ex II 2G	G-D3 IR Ex II 3G	G-D2 IR Ex II 2G	G-C3 Ex II 3G	G-C2 Ex II 2G	G-C3 IR Ex II 3G	G-C2 IR Ex II 2G
METHANE	S2156ME	S2157ME	S2625ME	S2626ME	S2096ME	S2097ME	S2623ME	S2624ME
LPG	S2156GP	S2157GP			S2096GP	S2097GP		
ACETIC ACID		S2157AA				S2097AA		
ACETONE		S2157AT		S2602AT		S2097AT		S2654AT
ACETYLENE		S2179AC				S2151AC		
AMMONIA		S2157AM				S2155AM		
BENZENE		S2157BZ				S2155BZ		
BUTANE	S2156BU	S2157BU	S2601BU	S2602BU	S2096BU	S2097BU	S2653BU	S2654BU
BUTYL ACETATE		S2157AB				S2097AB		
BUTYL ALCOHOL		S2157BT				S2097BT		
CYCLOPENTANE		S2157CP				S2097CP		
ETHANE		S2157EN		S2602EN		S2097EN		S2654EN
ETHYL ACETATE		S2157AE				S2097AE		
ETHYL ALCOHOL		S2157ET				S2097ET		
ETHYLENE		S2157EL				S2097EL		
ETHYLENE OXYDE						S2155OE		
HEPTANE		S2157EP		S2602EP		S2097EP		S2654EP
HEXANE		S2157ET		S2602ES		S2097ES		S2654ES
HYDROGEN		S2157H2				S2097H2		
ISO BUTANE		S2157IB		S2602IB		S2097IB		S2654IB
ISO BUTYL ALCOHOL		S2157IT				S2097IT		
ISO PENTANE		S2157IN				S2097IN		
ISO PROPYL ALCOHOL		S2157IP				S2097IP		
JET PROPELLER AVIO FUEL		S2108P8				S2154P8		
METHYL ALCOHOL		S2157MT				S2097MT		
METHYL ETHYL KETONE		S2157MK				S2097MK		
NONANE		S2157NN				S2097NN		
PENTANE		S2157PE		S2602PE		S2097PE		S2654PE
PETROL VAPOURS	S2156VB	S2157VB			S2096VB	S2097VB		
PROPANE	S2156PR	S2157PR	S2601PR	S2602PR	S2096PR	S2097PR	S2653PR	S2654PR
PROPYLENE		S2157PP		S2602PP		S2097PP		S2654PP
PROPYL ALCOHOL		S2157PN				S2097PN		
STYRENE		S2157ST				S2155ST		
TRI METHYLBENZENE		S2157TM				S2097TM		
TOLUENE		S2157TO				S2097TO		
VINYL ACETATE						S2155AV		
XYLENE		S2157XI				S2097XI		
Other gases on request								
Toxic gases	G-D3 Ex II 3G	G-D2 Ex II 2G	G-D3 IR Ex II 3G	G-D2 IR Ex II 2G	G-C3 Ex II 3G	G-C2 Ex II 2G	G-C3 IR Ex II 3G	G-C2 IR Ex II 2G
OXYGEN (O2) 25% Vol.	S2642O2	S2643O2			S2640O2	S2641O2		
CARBON MONOXIDE 500 ppm	S2162CO	S2163CO			S2130CO	S2131CO		
AMMONIA (NH3) 0-100 ppm	S3226AM	S3227AM			S3224AM	S3225AM		
AMMONIA (NH3) 0-200 ppm	S2164AM	S2165AM			S2132AM	S2133AM		
AMMONIA (NH3) 0-1000 ppm	S2166AM	S2167AM			S2134AM	S2135AM		
CARBON DIOXIDE 2% Vol			S2631CO2	S2634CO2			S2649CO2	S2651CO2
CARBON DIOXIDE 5% Vol			S2632CO2	S2635CO2			S2650CO2	S2652CO2
CARBON DIOXIDE 30% Vol			S2447CO2	S2449CO2			S2443CO2	S2445CO2
CARBON DIOXIDE 5000 ppm			S2448CO2				S2444CO2	
HYDROGEN 2000 ppm	S3594H2	S3313H2			S3592H2	S3593H2		
HYDROGEN SULPHIDE 50 ppm	S2168HS	S2169HS			S2136HS	S2137HS		
NITRIC OXYDE 100 ppm	S2176NO	S2177NO			S2144NO	S2135NO		
R134A			S3597R134A	S3163R134A			S3595R134A	S3596R134A
SF6			S3600SF6	S3601SF6			S3598SF6	S3599SF6
SO2, NO2, Cl2 and other toxic gases on request								
Accessories								
ST.GD/AD2 & ST.GD/AD3: Adapter to upgrade the ATEX protection from G to GD	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
STS/CSW: Calibration Software	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
STS/IDI: RS485 communication interface for SENTOX IDI and MULTISCAN++ panels	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
STS/CKD: Handheld calibration keypad.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
STS1REL: 1-Relay card.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
STS3REL: 3-Relay card.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


Technical specifications

Sensing element	Pellistor sensors for flammable gas Electrochemical cells for toxic gas IR sensors for HC, CO ₂ , SF ₆ , Refrigerant
Measuring range	%LEL for flammable gases ppm for toxic gases and refrigerants % vol for O ₂ and CO ₂
Power supply	12-24Vdc -20% +15%
Consumption at 12Vdc	90mA (medium); 130mA (max) Pellistor 50mA (medium); 70mA (max) electr.cell 90mA (medium); 130mA (max) IR
Visual indications	SMART3G-C: flickering LED SMART3G-D: 3 red LED's for Alarm yellow for Fault, green for PS
Display characteristics (SMART3G-D)	4 digits, 7.5 mm high, 7 segments
Proportional output	4-20 mA (200 Ω)
Serial Output (optional)	RS 485 and proprietary protocol for addressable gas control panels
Relay outputs, with mode status LEDs (optional)	3 relays with tension free changeover contact 24V-1A (non-latching type)
Accuracy	from ±2% to ±5% FS (depending on sensor type)
Repeatability	from ±2% to ±5% FS (depending on sensor type)
Warm-up time	2 minutes
Stabilization time	60 minutes (for test/calibration)
Response time T90	From 15 to 30 sec. for Pellistor and <60 sec. for other sensor type
Storage temperature	-25°C ÷ +60°C (or limits of the sensor)
Operating temperature	-20°C ÷ +60°C (-40°C ÷ +65°C or 75°C on request) for Pellistor and IR sensors, -20°C ÷ +50°C for cells Always refer to the detector's label
Relative humidity	20-90% RH / 40°C (5-95% RH non-condensing on request)
IP rating	IP65 for II 2G(D) (IP67 with: STGD/AD3 adapter and IP67 cable gland); IP55 for II3GD
Operative pressure	80-110 KPa
Max. air velocity	< 6 m/s
Weight	850÷1200 g Ex n 950÷1700 g Ex d
Dimension (approx.)	Ex d L.130 H.180 D.90 mm (max) Ex n L.106 H.180 D.65 mm (max)
Orientation	Detector must be mounted sensor head downwards
Certificates	CESI 17 ATEX 003X (ESR II 2G/2GD) CESI 16 ATEX 046X (Intrinsic Safety) CESI 02 ATEX 084 (Performance) IECEX CES 17.0011X & 17.0010X
EMC Reference Standards	EN 50270, EN 61000-6-4


Electrical connections

(4-20 mA SMART3 CONNECTION TO ANALOG CONTROL UNIT)


MORSETTIERA CENTRALE 4-20 mA
(4-20 mA CONTROL UNIT'S TERMINAL)

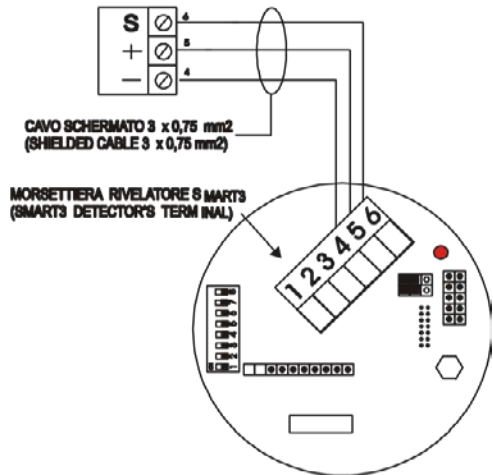

(RS485 SMART3 CONNECTION TO AN ADDRESSABLE CONTROL PANEL)

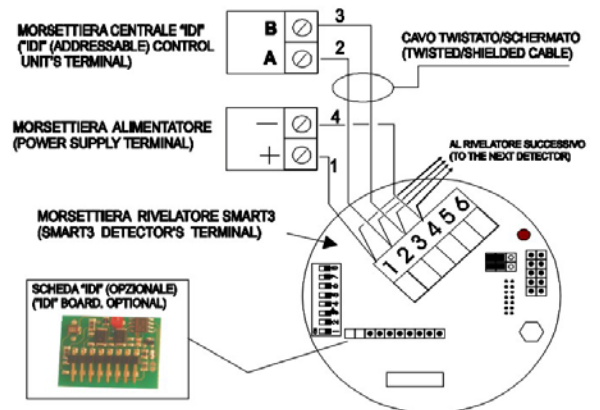

MECHANICAL DIMENSIONS (Measures in mm)

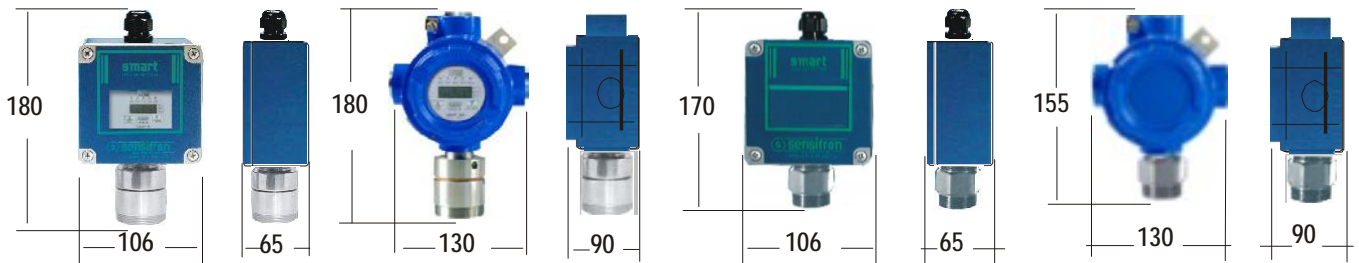

Distributed by:
Air-Met Scientific Pty Ltd
Air-Met Sales/Service
P: 1800 000 744
F: 1800 000 774
E: sales@airmet.com.au
Air-Met Rental
P: 1300 137 067
E: hire@airmet.com.au
W: www.airmet.com.au