

Oil & Water Interface Probe




Geotech Interface Probe with ORS-Style Frame

The Geotech Interface Probe with ORS-Style Frame accurately measures depth to hydrocarbons and water in monitoring wells and tanks by using an optical prism to detect hydrocarbon layers as thin as 1/200' (1.52mm).

FEATURES

- Rugged ORS-Style Frame, lightweight construction
 Packaged in NEMA 3, weather resistant, rugged aluminum
 housing. Includes wiper assembly to clean and reduce dirt
 and hydrocarbons from entering the reel assembly.
- Dependable, highly accurate
 Measurements to depth of fluid are accurate to within 1/100'
 (3.05mm). Can detect hydrocarbon layers as thin as 1/200'
 (1.52mm).
- Trigger-style brake lever
 Holds the tape in position while measurements are recorded
- Industry standard reliability
 More than 8,000 units in use worldwide
- Easy to use
 Each portable unit is calibrated and comes complete for immediate use
- · Grounding clip provided for anti-static safety
- Automatic sleep function (Power Conservation Mode)
- Field replaceable sensing prisms on standard and chemical probes
- Made in USA
- · Rental units available
- · Chemically resistant probe available
- Optional small diameter probe is only 5/8" (1.6 cm) in diameter

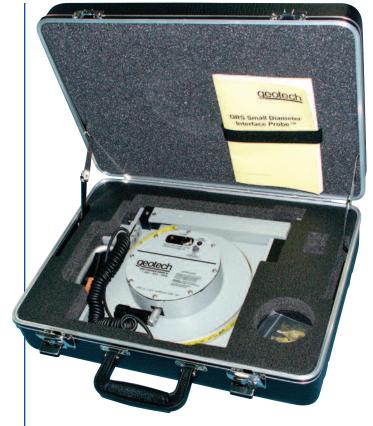



Standard 1" (2.5 cm) Intrinsically Safe Probe



Optional 5/8" (1.6 cm) Probe

CALL GEOTECH TODAY (800) 833-7958


Geotech Environmental Equipment, Inc. 2650 East 40th Avenue • Denver, Colorado 80205 (303) 320-4764 • **(800) 833-7958** • FAX (303) 322-7242



Oil & Water Interface Probe



Geotech Interface Probe with ORS-Style Frame

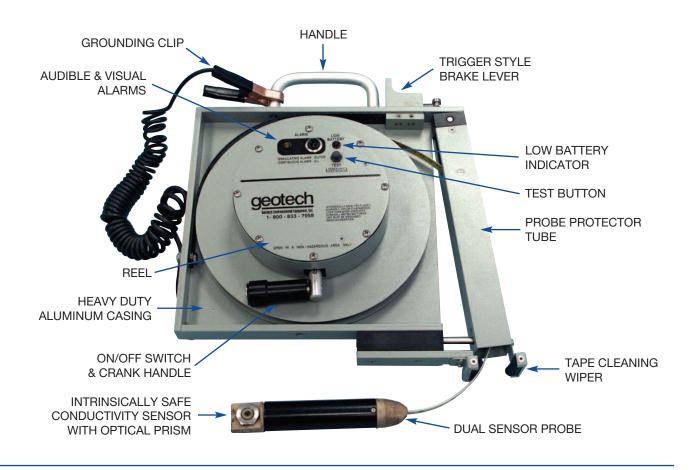

SPECIFICATIONS

Power: 9 Volt DC (six field replaceable AA size batteries)

Detectors: Optical prism (includes field replaceable spare) and conductivity sensor

Dimensions: 12" x 12" x 4" (30.48 x 30.48 x 10.16 cm)

Standard or Chemical Probe 1" (2.5 cm) in diameter

Small Probe 5/8" (1.6 cm) in diameter

Weight: 7.8 lbs. (2.9 kg)

Enclosure Rating: NEMA 3

Accuracy: Measurements of fluid depth accurate to within 1/100' (3.05 mm),

detection of hydrocarbon layers as thin as 1/200' (1.52 mm)

Standard: Lightweight, rugged ABS carrying case

Warranty: 1 year

CALL GEOTECH TODAY (800) 833-7958

Geotech Environmental Equipment, Inc.

2650 East 40th Avenue • Denver, Colorado 80205 (303) 320-4764 • (800) 833-7958 • FAX (303) 322-7242 email: sales@geotechenv.com website: www.geotechenv.com

